Warning, Offer of Sale

⚠ WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users h aving technical expertise. It is important that you analyze all aspects of your application including consequences of any failure, and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated on the separate page of this document entitled “Offer of Sale”.

© Copyright 2010-2005 Parker Hannifin Corporation. All Rights Reserved

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Index

Introduction		
Direct Acting		“XM” Series
		15mm Solenoid Valve
Stacking		Moduflex Series
		“PVL” Series
Inline		Viking Lite
		Viking Xtreme
		“B” Series
		“ADEX” Series
		“N” Series
Subbase & Manifold		Isys Micro Series
		Isys ISO Series
		Fieldbus Systems
		“DX” ISOMAX Series
		Valvair II
Manual / Mechanical		Directair 2 & 4 Series, Manual/Mechanical
		“42” Lever / Pedal Series
		Viking Xtreme Lever Series
		“M0” Series
		“LV” / “EZ” Lockout Valves
		Brass Poppet / Sliding Seal / “PL”/“VL” / “HV”
Accessories		Control Panel Products
		Sensing
		Flow Controls & Accessories
Safety Guide, Offer of Sale		

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Index

• Valve Selector Chart (By Flow) • Fieldbus Solutions Guide • Fluid Power Graphic Symbols • Technical Information • 5-Year Warranty		A
• Direct Acting Solenoid • 3-Way & 4-Way • Inline • IEM Bar Manifold • Subbase Valve Manifolds • .15 Cv	www.parker.com/pneu/xm	B Direct Acting
• Compact & Simplified Design • Subbase or Manifold Option • 3-Way • NO & NC on Same Manifold • Wide Range of Voltage • .033 to .05 Cv	www.parker.com/pneu/15mm	
• Stand Alone Valves • Valve Island • Collective Wiring or Fieldbus Configuration • 3-Way & 4-Way • Modular & Flexible Design • Multiple Pressure Option • Compact & Low Weight • .18 to .80 Cv	www.parker.com/pneu/moduflex	C Stacking
• Compact Composite Design • Modular with a Wide Range of Voltages • 3-Way & 4-Way • Fieldbus Available • .6 to 1.2 Cv	www.parker.com/pneu/pvl	
• Inline valve. Optional aluminum bar manifolds • 3 valve sizes: 1/8, 1/4 & 3/8. CV: 0.6 to 2.5 • Pressures up to 145 PSIG & temperatures between 14°F to 122°F • Bi-directional WCS spool	www.parker.com/pneu/viking	D Inline
• Extreme Temperature & Pressure Ranges • ATEX Options • 4-Way • Wide Range of Voltages for Mobile Industries • Unique Overmoulded Spool Technology • .7 to 2.7 Cv	www.parker.com/pneu/vikingx	
• Wide Range of Sizes & Flows • Multiple Options • IEM Bar Manifold • 3-Way & 4-Way • Wear Compensating Dynamic Sealing System • .75 to 7.0 Cv	www.parker.com/pneu/b	
• 10mm 3-Way • 15mm & 20mm 4-Way • Low Power Consumption • Subbase & Inline Body • Individual & Collective Wiring Solutions • .01 to.47 Cv	www.parker.com/pneu/adex	
• Robust Poppet Design • Fast Response & High Flow • 2-Way & 3-Way • High Maximum Pressure Option • 3.6 to 29.9 Cv	www.parker.com/pneu/n	
• Compact Valves with High Flow • Innovative Back to Back Mounting Style with 4 Valves in a 42mm Width • Plug-in Design with Collective Wiring on Fieldbus or 25 Pin Cable • .35 Cv	www.parker.com/pneu/isysmicro	E Subbase & Manifold
• ISO Valve Platform, 18mm, 26mm, Size 1, Size 2, & Size 3 Plug-in • Collective Wiring on Fieldbus or 25-Pin or M23 Cable • Non Plug-in Valves with 3-Pin Din or Mini Connectors • .55 to 6.0 Cv	www.parker.com/pneu/isys	
• Isys Micro Fieldbus • Moduflex Fieldbus • Isysnet Fieldbus • Turck Fieldbus	www.parker.com/pneu/isysnet	
• ISO Valve Platform, 18mm, 26mm, Size 1, Size 2, & Size 3 • Non Plug-in Valves with 3-Pin Din or Mini Connectors • .55 to 4.15 Cv	www.parker.com/pneu/isomax	
• Robust Spool Design • Fast Response & High Flow • Plug-in & Direct Pipe Design • 4-Way • Hazardous Duty Option • 1.9 to 12.0 Cv	www.parker.com/pneu	
• Robust Poppet & Spool Designs • 3-Way & 4-Way • Manual & Mechanical • Plunger, Roller, One-Way Tripper, Button, Hand Lever, Togglel, Treadle • 1/8" & 1/4" NPT • .17 to .83 Cv	www.parker.com/pneu/directair	F Manual Mechanical
• Heavy Duty Design • 4-Way • Lever, Pedal Operated • 1/4" & 3/8" NPT • 1.3 to 2.8 Cv	www.parker.com/pneu/42ser	
• Heavy Duty Lever Operated • 4-Way • 1/8 to 1/2" NPT • .7 to 2.7 Cv	www.parker.com/pneu/vikingx	
• Heavy Duty Design • Bronze Body • 3-Way & 4-Way, Air Pilot Manual & Mechanical Valves • 1/4" to 1" NPTF Ports • 2.4 to 12.4 Cv	www.parker.com/pneu	
• Compliant with OSHA Standard 29 CFR 1910 • Lockout / Soft Start • 3.7 to 14.0 Cv	www.parker.com/pneu/lockout	
• Manual Valves • Lever & Button Operators • 1/8" thru 1/2" Ports • Wide Range of Sizes & Flows • .5 to 1.25 Cv	www.parker.com/pneu/ssv	
• Variety of Control Panel Options - Push Buttons - Indicators - Foot Pedals • Large Selection of Options • Two-Hand Control Conformance with EN 574	www.parker.com/pneu/cpp	G Accessories
• Large Variety of Limit & Pressure Switches • Limit Switches for Standard & Heavy Duty Service • Blocking Valves for Air, Gas & Liquid Service • Threshold Sensors for Monitoring Cylinder Exhaust	www.parker.com/pneu/limsen	
• Flow Controls • Check Valves • Needle Valves • Muffler & Silencers • Relief Valves • Quick Exhaust Valves • Ball Valves • Fittings • Tubing & Hose • Quick Couplings	www.parker.com/pneu/accessories	
• Model Number to Page Number Index • Safety Guide • Offer of Sale		H

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Control Panel Products

Human / Machine Dialog

Section G

www.parker.com/pneu/cpp

Basic Features G2-G3
Push Button, Selector Switches with Bodies G4
Push Buttons G5
Selector Switches G6
Valve Bodies & Accessories G7
Dimensions & Assembly G8
Legend Plates, Specifications G9
Mounting G10
Visual Indicators 22mm (7/8") G11
Two-Hand Controls G12-G13

BOLD ITEMS ARE MOST POPULAR.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

HUMAN-MACHINE DIALOG requires devices such as push buttons and selector switches to provide command inputs. A wide variety of these devices is available to meet most application needs. Both pneumatic and electrical switch bodies are available to match system technology. All of these devices use the 22 mm (7/8") mounting standard.

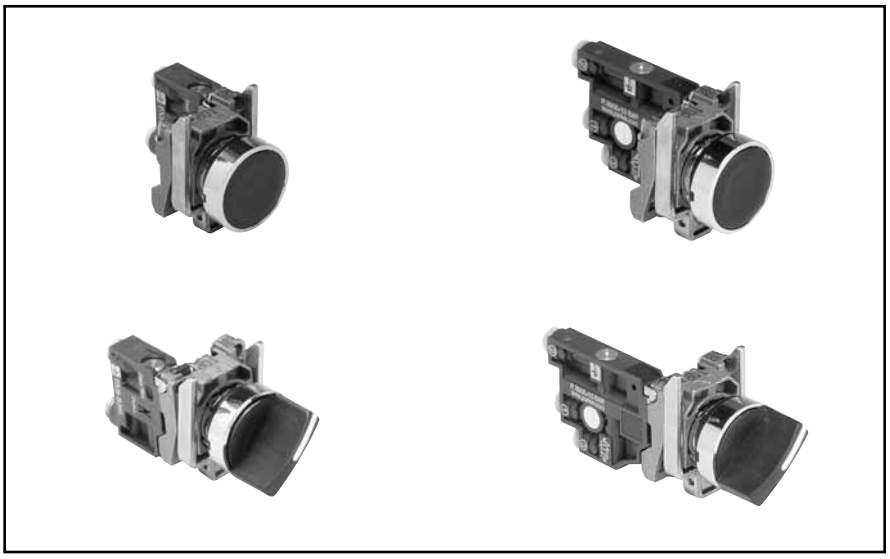

PNEUMATIC VISUAL INDICATORS

An indicator ball is rotated by a pneumatic input, changing the visible color. The ball sits behind a clear plastic window, providing a wide field of view. The visual indicators are available in five brightly colored Day-Glow paints for increased visibility. Like push buttons and selector switches, visual indicators use the 22mm (7/8") mounting standard.

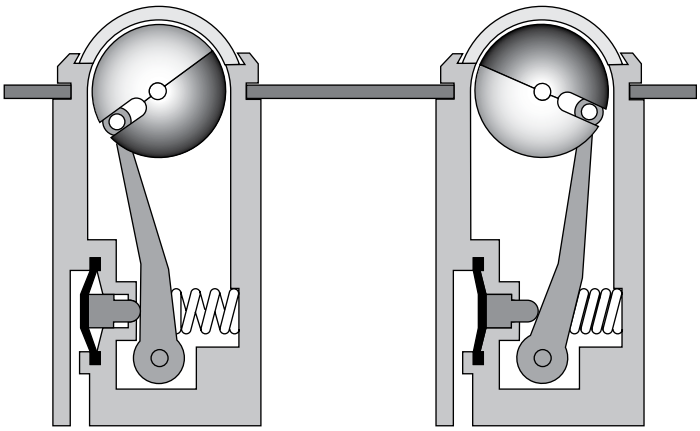

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

MODULAR PNEUMATIC / ELECTRIC PUSH BUTTONS

As with electrical contact switches, pneumatic valve modules can be mounted on a number of different operating heads.

- Pneumatic normally non passing (NNP) is equivalent to electrical normally open (N.O.).
- Pneumatic normally passing (NP) is equivalent to electrical normally closed (N.C.).

Note: Electrical switches can be stacked, but the rear connection on pneumatic switches prevents stacking. Therefore, when mixing electrical and pneumatic switch bodies on the same operator, the pneumatic switch must be mounted last.

PXBB3911

PXBB4932

PXBB4931

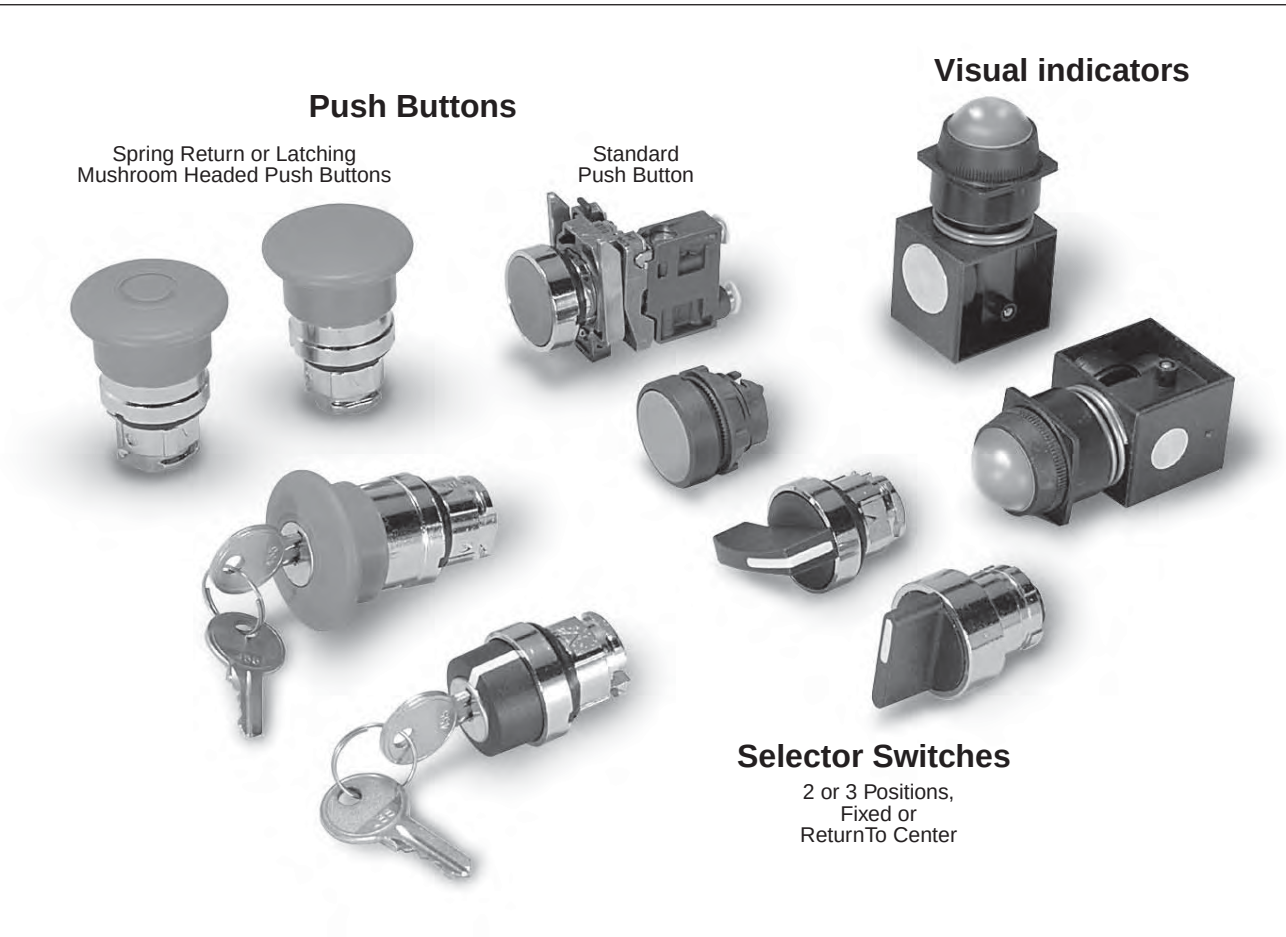

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

With 3/2 Valve Bodies 5/32" Instant Straight Connections

Flush Push Buttons

PXBB3111BA2

PXBB4131BA2

Part Number	Color	Function	Type of Switching*
PXBB3111BA2	Black	Spring Return	NNP
PXBB3111BA3	Green		
PXBB3111BA4	Red		
PXBB3251BA2	Black	Spring Return	NNP+NP
PXBB4131BA2	Black	Spring Return	Single Universal 3-Way
PXBB4131BA3	Green		
PXBB4131BA4	Red		
PXBB4231BA2	Black	Spring Return	Dual Universal 3-Way

* Type of switching: Universal 3-way: valve can be connected either as NP or NNP as required by connecting the primary air supply to port 1 or port 3.

Note: Mount up to three valves on mounting ring.

Mushroom Head Push Buttons

(40mm Diameter)



PXBB3111BC2



PXBB4131BC2

Part Number	Color	Function	Type of Switching*
PXBB3111BC2	Black	Spring Return	NNP
PXBB3111BT4	Red	Push-Pul	
PXBB3121BT4	Red	Push-Pull	NP
PXBB4131BC2	Black	Spring Return	Single Universal 3-Way
PXBB4131BT4	Red	Push-Pull	

* Type of switching: Universal 3-way: valve can be connected either as NP or NNP as required by connecting the primary air supply to port 1 or port 3.

Note: Mount up to three valves on mounting ring.

Selector Switches



PXBB3111BD2



PXBB4131BD2

Part Number	Color	Function	Type of Switching*
PXBB3111BD2	Black	2 Maintained	NNP
PXBB3211BD2	Black	Positions with	NNP+NNP
PXBB3251BD2	Black	Std. Handle	NNP+NP
PXBB3211BD3	Black	3 Maintained Positions with Std. Handle	NNP+NNP
PXBB3251BD3	Black		NNP+NP
PXBB3211BJ5	Black	3 Positions, Spring Return to Center with Long Handle	NNP+NNP
PXBB4131BD2	Black	2 Maintained Positions with Std. Handle	Single Universal 3-Way
PXBB4231BD2	Black	2 Maintained Positions with Std. Handle	Dual Universal 3-Way
PXBB4231BD3	Black	3 Maintained Positions with Std. Handle	Dual Universal 3-Way
PXBB4231BJ5	Black	3 Maintained Positions with Long Handle	Dual Universal 3-Way

* Type of switching: Universal 3-way: valve can be connected either as NP or NNP as required by connecting the primary air supply to port 1 or port 3.

BOLD ITEMS ARE MOST POPULAR.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

For Use With PXBB Valve Bodies and ZBE Electrical Switch Bodies

Push Buttons

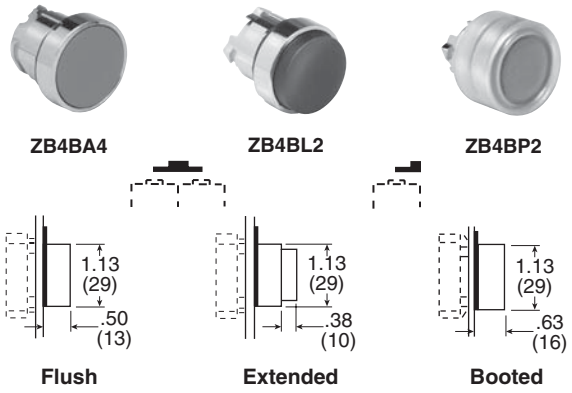

Plastic Head ZB5**	Metal Head ZB4*			
Part Number	**Part Number**	**Color**	**Function**	**Description**
ZB5AA2	**ZB4BA2**	Black	Spring Return	Flush
ZB5AA3	**ZB4BA3**	Green		
ZB5AA4	**ZB4BA4**	Red		
—	ZB4BA5	Yellow		
—	ZB4BA6	Blue		
ZB5AL2	**ZB4BL2**	Black	Spring Return	Extended
ZB5AL3	**ZB4BL3**	Green		
ZB5AL4	**ZB4BL4**	Red		
—	ZB4BL5	Yellow		
—	ZB4BP2	Black	Spring Return	Booted
—	ZB4BP3	Green		
—	ZB4BP4	Red		

* ZB4*** Model Numbers are Metal Head Operators

** ZB5*** Model Numbers are Plasticl Head Operators

Push / Push Buttons

ZB4BH02

Part Number*	Color	Function	Description
ZB4BH02	Black	Detent 2-Position	Flush
ZB4BH03	Green		
ZB4BH04	Red		

* ZB4**** Model Numbers are Metal Head Operators

Mushroom Head Push Buttons

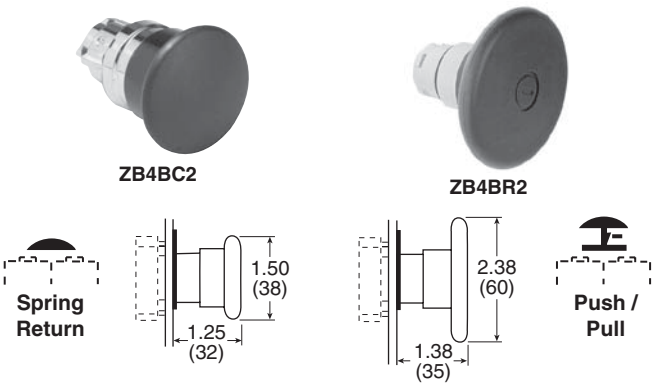

Part Number*	Color	Function	Description
ZB4BC2	Black	Spring Return	Ø 40mm Head
ZB4BC3	Green		
ZB4BC4	Red		
ZB4BT2	Black	Latching Push-Pull	
ZB4BT3	Green		
ZB4BT4	Red		
ZB4BR2	Black	Spring Return	Ø 60mm Head
ZB4BR3	Green		
ZB4BR4	Red		

* ZB4*** Model Numbers are Metal Head Operators

Mounting Accessories

ZB5AZ905

Part Number	Color	Description
ZB5AZ905	—	Plastic Head (ZB5) Mounting Nut Tightening Tool
ZBZ1602	Black Plastic	Guard for 40mm

BOLD ITEMS ARE MOST POPULAR.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

For Use With PXBB Variable Composition Switch Bodies

Selector Switches

ZB4BD3

ZB4BJ3





Standard Selector



Knob Lever

Standard Black Handle		
Part Number*	**Description**	**Function**
ZB4BD2	Maintained	2-Positions
ZB4BD4	Spring Return from Right to Left	
ZB4BD3	Maintained	3-Positions
ZB4BD5	Spring Return to Center from Left and Right	
ZB4BD7	Maintained Right Spring Return from Left to Center	3-Positions
ZB4BD8	Maintained Left Spring Return from Right to Center	3-Positions
Long Black Handle		
ZB4BJ2	Maintained	2-Positions
ZB4BJ4	Spring Return from Right to Left	
ZB4BJ3	Maintained	3-Positions
ZB4BJ5	Spring Return to Center from Left and Right	

* ZB4*** Model Numbers are Metal Head Operators

Mushroom Head Push Buttons with Key Select





ZB4BS944

Part Number*	Color	Function	Description
ZB4BS844	Red	Latching Turn to Release	Ø 40mm Head
ZB4BS944	Red	Key Latching	

* ZB4**** Model Numbers are Metal Head Operators

Key Operated Selectors





ZB4BG2

Key Operated		
Part Number*	**Key Withdrawal**	**Function**
ZB4BG2	Left	2 Maintained Positions
ZB4BG4	Left and Right	
ZB4BG3	Center	3 Maintained Positions
ZB4BG5	Left and Right	
ZB4BG7	Center	3-Positions 2 Spring Return to Center

* ZB4*** Model Numbers are Metal Head Operators

Mushroom Head Push Buttons with Key Select





ZB4BS24

Part Number*	Color	Function	Description
ZB4BS54	Red	Latching Turn to Release	Ø 40mm Head
ZB4BS14	Red	Key Latching	
ZB4BS64	Red	Latching Turn to Release	Ø 60mm Head
ZB4BS24	Red	Key Latching	

* ZB4**** Model Numbers are Metal Head Operators

BOLD ITEMS ARE MOST POPULAR.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

For Use With 22mm (7/8") Metal Operating Heads 5/32" Instant Connections

3/2 Valve Bodies with Mounting Ring



PXBB3111B



PXBB4131B

Part Number	Connections	Function	Type of Switching*
PXBB3111B	5/32" Instant	3/2	NNP
PXBB3121B	5/32" Instant	3/2	NP
PXBB4131B	5/32" Instant	3/2	Universal 3-Way

Note: • Mount up to 3 valves on mounting ring for push buttons.
• Mount up to 2 valves on mounting ring for selector switches, Valves **cannot** be mounted in center position.

Specifications

Air Quality –
Standard Shop Air, Lubricated or Dry ..... 40 µm Filtration

Flow –
PXBB3• ..... Cv=.08
PXBB4• ..... Cv=.18

Materials –
Body ..... Polyamide
Operating Head ..... Zinc Alloy & Plastic

Operating Positions ..... All Positions

Operating Pressure –
PXBB3• ..... 15 to 115 PSIG (1 to 9 bar)
PXBB4• ..... 15 to 145 PSIG (1 to 10 bar)

Ports ..... 5/32" Instant for Semi-Rigid Nylon or Polyurethane Tube

Temperature –
Operating ..... 5°F to 140°F (-15°C to + 60°C)

Additional Valve Bodies

PXBB3911

PXBB4932



PXBB4931

Part Number	Connections	Function	Type of Switching*
PXBB3911	5/32" Instant Straight	3/2	NNP
PXBB3912	5/32" Instant Swivel		
PXBB3921	5/32" Instant Straigh	3/2	NP
PXBB3922	5/32" Instant Swivel		
PXBB4931	5/32" Instant Straight	3/2	Universal 3-Way
PXBB4932	5/32" Instant Swivel		

BOLD ITEMS ARE MOST POPULAR.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

PXB-B3 Dimensions

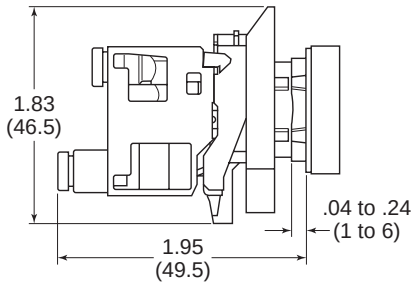

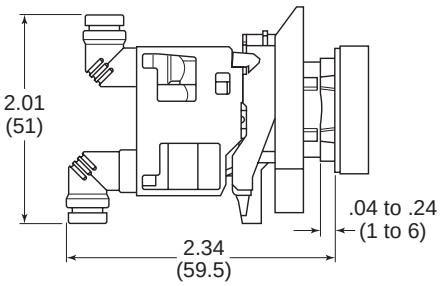



PXB-B4 Dimensions

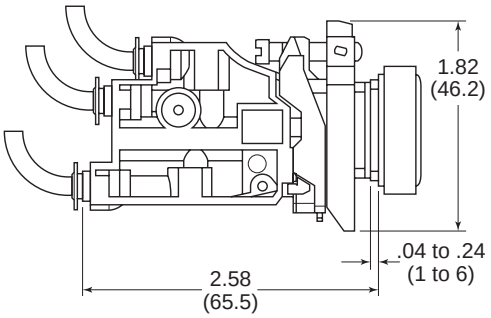

Tube Bending Radius
For PXBB3 and PXBB4

- 4 mm O.D. x 2 mm I.D. Tube = Minimum 0.39 (10) Radius
- 4 mm O.D. x 2.7 mm I.D. Tube = Minimum 0.59 (15) Radius

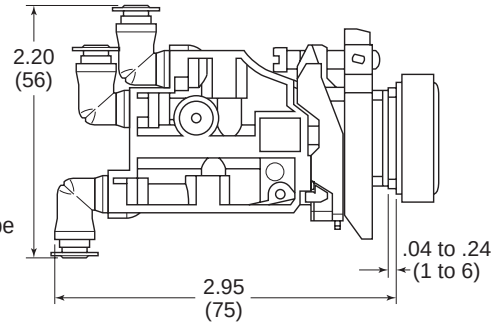

Assembly

Assembling PXB Valves On Mounting Block





Assembling PXB Valves On the Back of the Electrical Contact

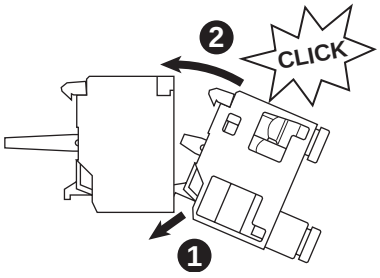



Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

For Push Buttons and Visual Indicators

Legend Plates for PXBB Devices (22mm)

ZBY••••

Part Number	Description		
Without Text For Customer Engraving			
ZBY2101	Black / Red Background (White Letters)		
ZBY4101	Yellow / White Background (Black Letters)		
With Text For Push Buttons			
ZBY2303	Start		
ZBY2304	Stop		
ZBY2305	Forward		
ZBY2306	Reverse		
ZBY2307	Up		
ZBY2308	Down		
ZBY2309	Right		
ZBY2310	Left		
ZBY2311	On		
ZBY2312	Off		
ZBY2313	Open		
ZBY2314	Close		
ZBY2321	Inch		
ZBY2323	Reset		
ZBY2326	Power On		
ZBY2327	Slow		
ZBY2328	Fast		
ZBY2330	Emergency Stop		
ZBY2334	Run		
With Text For 2-Position Selectors			
ZBY2367	Off	On	
With Text For 3-Position Selectors			
ZBY2387	Hand	Off	Auto

Blank Legend Plates for Inscription

For PXBB Devices *(2 lines of 11 characters maximum)*

Please indicate the required text when ordering.
(Allow 3 weeks for delivery)

Part Number	Description
ZBY2002	Black Background / White Letters

For 22mm Visual Indicators Only

2 lines of 11 characters maximum

Please indicate the required text when ordering.
(Allow 3 weeks for delivery)

Part Number	Description
ZB2BY2002	Black Background / White Letters

Accessories

ZBE101

Electrical Switch Bodies

When combined with pneumatic valves ,these contact blocks allow different forms of power to be provided from a single push button. Can be mounted with both types of valves PXBB3 / PXBB4.

Electrical Specification: 240V, 10Amp

Part Number	Type of Contact
ZBE101	Normally Open (NO)
ZBE102	Normally Closed (NC)

Note: Plastic Mounting Ring ZB5AZ009 to be used with ZB5 Plastic Operating Heads.

Metal Mounting Ring ZB4BZ009 to be used with ZB4 Metal Operating Heads.

Metal: ZB4BZ009

Plastic: ZB5AZ009

Mounting Ring for Valve Bodies, Switch Bodies and Operating Heads

To make up a complete push button with one to three switching elements with 5/32" instant connections, use this mounting block and select the operating heads and bodies in this Section.

Part Number	Description
ZB4BZ009	Metal Mounting Ring
ZB5AZ009	Plastic Mounting Ring

To make up a complete selector switch with one or two switching elements with 5/32" instant connections, use this mounting block and select the operating heads and bodies in this Section.

Part Number	Description
ZB4BZ009	Metal Mounting Ring
ZB5AZ009	Plastic Mounting Ring

Note: To release push button from mounting ring, pull lever on top of mounting ring up and remove push button operator. To assemble push button operator to mounting ring, align arrows and snap into place.

BOLD ITEMS ARE MOST POPULAR.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Functionality Explanation

Fluid Power			Universal Description	Electrical	
Function	Symbol			Function	Symbol
Normally Closed (N.C.)	2-Way	3-Way	Normally Non-Passing (NNP)	Normally Open (N.O.)	
Normally Open (N.O.)	2-Way	3-Way	Normally Passing (NP)	Normally Closed (N.C.)	

Type of Switching: Universal 3-Way: Valve can be connected either as NP or NNP as required by connecting the primary air supply to port 1 or port 3.

NP 3 2 NNP 1 2

NNP: Normally Non-Passing.

NP: Normally Passing.

NNP + NNP: Double Switch Body, Both Normally Non-Passing.

NNP + NP: Normally Non passing and Normally-Passing.

NP + NP: Both Normally Passing.

Combination of Output Devices On a Single Mounting Block

Up to 3 output devices (valves or electrical contacts) can be mounted side by side on 1 mounting block.

Note: The central position can only be activated by push button heads.

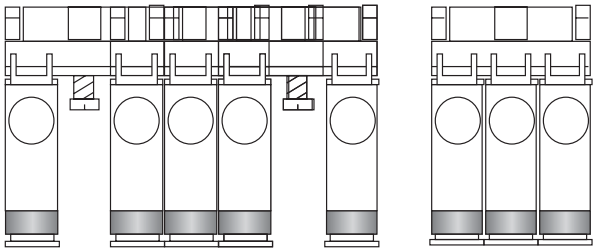

Electrical Contacts and Valves can be Combined Either Side by Side, or by Mounting the Valve on the Back of the Electrical Contact.



Side by Side Combination



Combination by Mounting Valves On the Back of the Electrical Contact

Assembling Output Devices and Heads On ZB5 Series Mounting Block

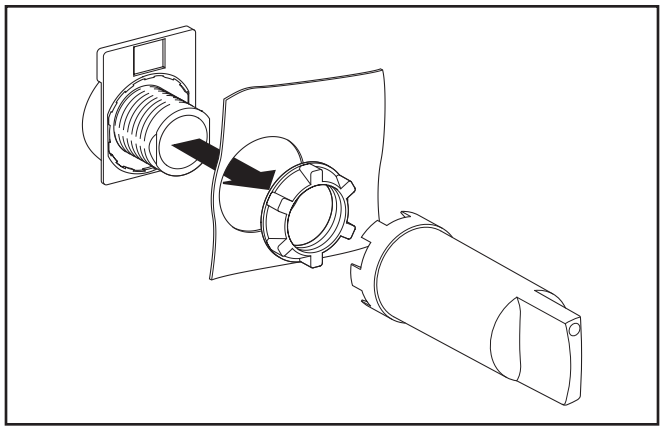

Replacement Old Style Mounting

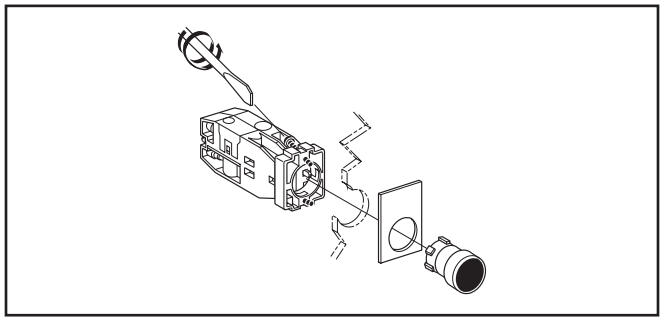

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

With 5/32" Instant Connections

22mm Visual Indicators

PXVF131

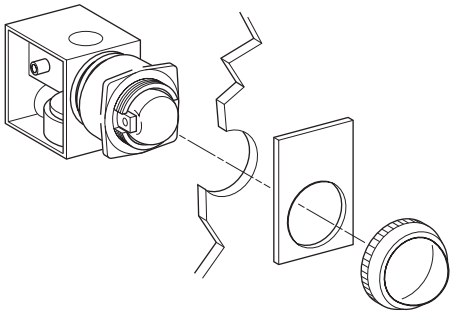

Mounting

Black Plastic Bezel		
Part Number "ON" Indicator	**Part Number "OFF" Indicator**	**Color**
PXVF131	**PXVF1213**	Green
PXVF141	**PXVF1214**	Red
PXVF151	**PXVF1215**	Yellow
PXVF161	**PXVF1216**	Blue
PXVF111	**PXVF1211**	White

Notes:

- The Pneumatic Indicators are black in one position and colored in the other. The colored position corresponds either to the presence of a pressure ("ON" Indicator) or the absence of pressure ("OFF" Indicator).
- For Legend Plates, see page G9.

Specifications

Air Quality –
Standard Shop Air, Lubricated or Dry, 40µm Filtration

Materials –
Body..... Polyamide
Operating Head..... Zinc Alloy & Plastic

Number of Operations with Dry Air at 90 PSI (6 bar) and 68°F (20°C) - Frequency 1 Hz..... 1 million Operations
Mushroom Head ..... 300,000 Operations

Operating Positions..... All Positions

Operating Pressure ..... 15 to 115 PSIG (1 to 8 bar)

Ports –
Standard .....5/32" Instant for Semi- Rigid Nylon or Polyurethane Tube
10-32 UNF Available

Temperature –
Operating .....32°F to 122°F (0°C to + 50°C)
Storage ..... -22°F to 140°F (-30°C to +60°C)

Dimensions

PXVF1• •



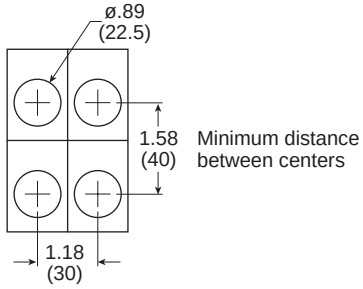

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Features

- The pre-assembled two-hand control enclosure occupies both hands of an operator by requiring nearly simultaneous operation of two pushbuttons
- Poppet – snap-acting (no spools)
- Same air as in cylinders – Filtration: 40 micron
- No lubrication required

PXPC111

Part Number	Connections
PXPC111	5/32" Instant

Operation



- Output "S" will appear only if "A" and "B" are simultaneously operated (within .5 seconds or less of each other).
- If the operator actuates only one pushbutton, either "A" or "B", or if both "A" and "B" are actuated but at an interval greater than .5 seconds, output "S" will not appear.
- Output "S" is regenerated by supply "P". Output "S" will therefore disappear if supply "P" is cut off.
- Output "S" will disappear if either "A" or "B" is released.
- If output "S" disappears for any reason, "A" and "B" must be nearly simultaneously actuated to again provide output "S".
- Since output "S" is regenerated it appears sharply, at full force (snap-acting), and is quickly exhausted upon deactivation. In addition the module is not affected by the length or diameter of tubing used for output "S".

General Characteristics

Operating Pressure .....40 to 120 PSI (3 to 8 bar)

Permissible Fluids –
Air or neutral gas 40 micron filtration, lubricated or dry

Flow at 90 PSI (6 bar) ..... 7 SCFM (200 l/mn ANR)

Operating Temperature .....-5°F to 140°F (-15°C to 60°C)
Below 40°F (5°C), an air dryer is required

Storage Temperature.....-40°F to 160°F (-40°C to 70°C)

Number of operations with dry air at 90 PSI (6 bar), 68°F (20°C), frequency 1 Hz..... 1 Million Operations

Vibration resistance –
Conforms to section 19-2 of bureau Véritas regulations (November 1987)

Materials –
Body.....Glass Filled Nylon
Operating Head ..... Zinc Alloy and Plastic

Connections:..... 5/32" instant

Mounting

Approvals:

- In accordance with European Standard EN 574 - September 1996
- Conforms to the model that has obtained CE Type Test Certificate No. 02526 520 4631 0397

⚠ WARNING

These devices should NOT be used in any application involving rotary clutch presses. Two hand control modules do not of themselves insure the safety of any machine. Users and original equipment manufacturers are responsible for making sure that installations meet all relevant safety regulations.

Dimensions

Inches (mm)

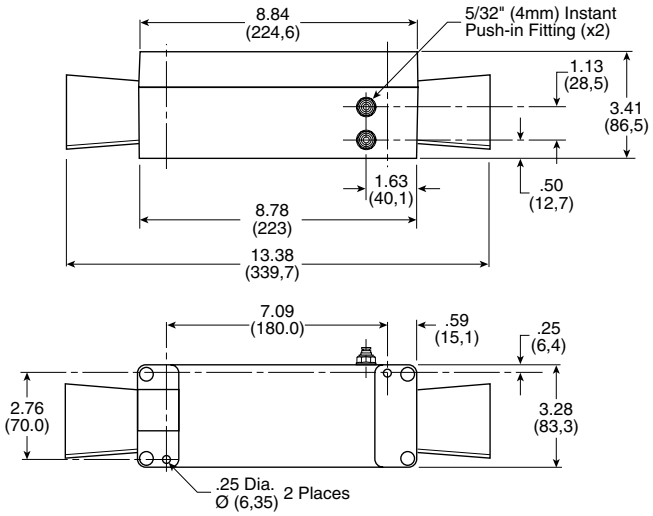

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Two-Hand Control Module



PXPA11

Part Number	Connections
PXPA11	5/32" Instant

Dimensions



PXPA11

Specifications

Air Quality –
Standard Shop Air, Lubricated or Dry, 40µm Filtration
Flow at 90 PSI (6 bar) in SCFM (l/mn ANR) 7 (200)
Materials –
Body..... Polyamide
Operating Head..... Zinc Alloy & Plastic
Nominal Bore Ø in Inches (mm)..... 7/64" (2.5)
Number of Operations with Dry Air at 90 PSI (6 bar) and 68°F (20°C) - Frequency 1 Hz..... 1 million Operations
Operating Positions..... All Positions
Operating Pressure ..... 40 to 115 PSIG (3 to 8 bar)
Ports –
5/32" Instant for Semi-Rigid Nylon or Polyurethane Tube
Temperature –
Operating .....32°F to 122°F (0°C to + 50°C)
Storage ..... -22°F to 140°F (-30°C to + 60°C)
Vibration resistance:
Conforms to section 19-2 of bureau Véritas regulations (November 1987)

⚠ WARNING

These devices should NOT be used in any application involving rotary clutch presses. Two hand control modules do not of themselves insure the safety of any machine. Users and original equipment manufacturers are responsible for making sure that installations meet all relevant safety regulations.

Notes: These two-hand control modules provide an output signal upon nearly concurrent operation of two pushbuttons.

Two-Hand Control Module Guard

PPRL15

Part Number	Base Component
PPRL15	PXPC111

Two Hand Repair Parts

Part Number	Quantity Required	Description
PXPA11	1	Control Module
PXBB3111B	2	Valve Body & Mounting Ring
ZB4BR*	2	Push Button
PPRL15	2	Control Module Guard

* 2 = Black, 3 = Green, 4 = Red

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Notes

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Sensing

Pneumatic Control Components

Section G

www.parker.com/pneu/limsen

Basic Features – Pneumatic Sensors G16

Limit Switches

- 3/2 Miniature Limit Switches G17-G18
- 3/2 Compact Limit Switches..... G19-G20
- “K” Series – Standard Duty Limit Switches... G21-G24
- “J” Series – Heavy Duty Limit Switches..... G25-G27

PWBA Blocking Valves G28-G29

Threshold Sensors G30-G32

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

To achieve the sensing or feedback function, pneumatic sensors can be:

- Limit Switches in a Variety of Sizes and Configurations
- Pressure Switches with Many Adjustable Ranges
- Components Designed Specifically for Pneumatic Technology using Pressure Variation, Air Bleed or Blocking for Detection.

A wide variety of pneumatic sensors are available to suit any application requirement.

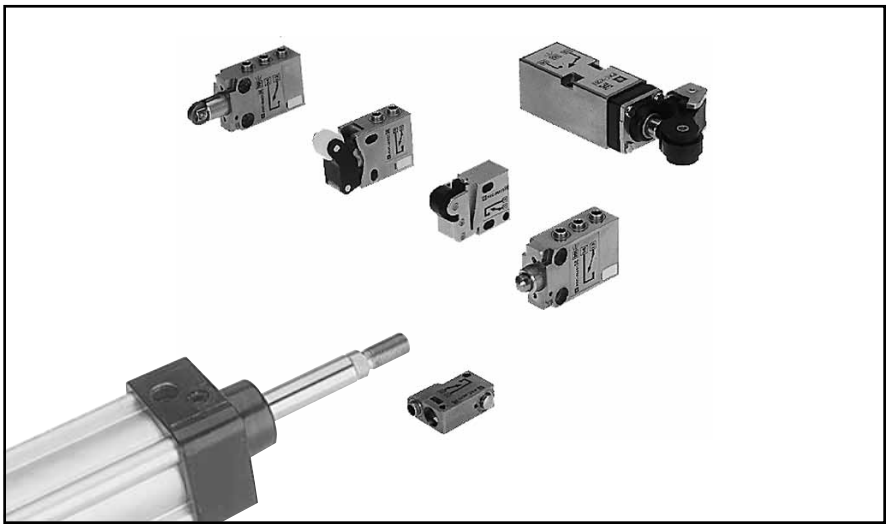

PNEUMATIC LIMIT SWITCHES

Pneumatic limit switches are non-passing (NNP) or passing (NP) when actuated by a moving part. The various operating levers, bore dimensions and functions are given below.

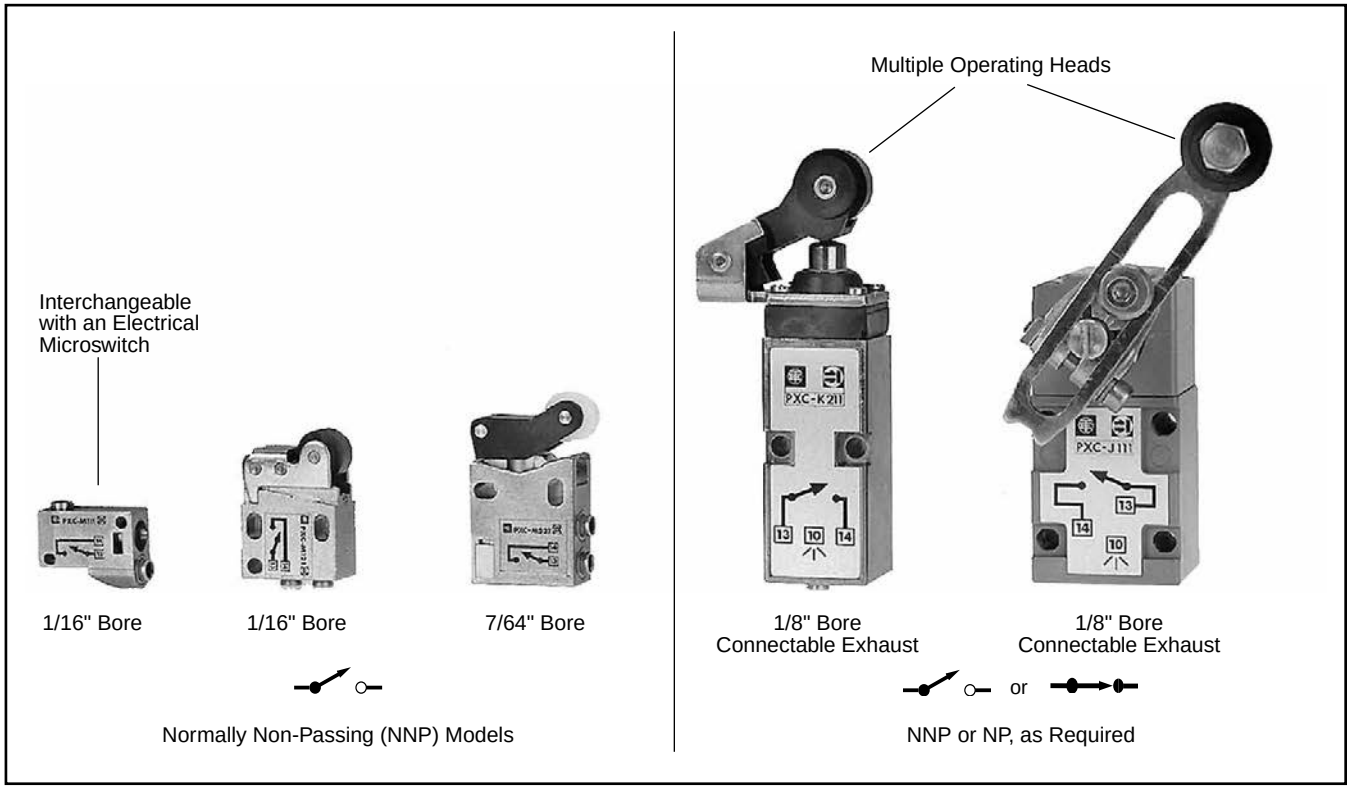

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Direct Acting Limit Switches

1/16" I.D. Internal Orifice

PXCM111

PXCM121

Part Number	Connection	Actuator	Type of Switching*
PXCM111	5/32" Instant	Steel Plunger Operating Levers Available (See Below)	NNP
PXCM115	10-32 UNF		
PXCM121	5/32" Instant	Plastic Roller	NNP
PXCM125	10-32 UNF		

7/64" I.D. Internal Orifice

PXCM521

Part Number	Connection	Actuator	Type of Switching*
PXCM521	5/32" Instant	Plastic Roller	NNP

Actuators For Steel Plunger

PXCZ11

Use with PXCM11*

Part Number	Actuator
PXCZ11	Plastic Roller Lever
PXCZ12	Plastic Roller Lever, One Way Trip

* NNP: Normally Non-Passing.

Specifications

Air Quality –
Standard Shop Air, Lubricated or Dry, 40µm Filtration

Flow SCFM (Nl/min) –
PXCM111 ..... 2.2 (60)
PXCM121 ..... 3.0 (85)
PXCM521 ..... 8.8 (250)

Materials –
Body ..... Zinc Alloy
Poppets ..... Polyurethane
Seals ..... Nitrile (Buna N)

Maximum Operating Frequency ..... 5 Hz

Nominal Bore Ø –
PXCM111, PXCM121 ..... 1/16" (1.5 mm)
PXCM521 ..... 7/64" (2.5 mm)

Number of Operations with Dry Air at 90 PSI (6 bar) and 68°F (20°C) – Frequency 1 Hz ..... 10 Million

Operating Positions ..... All Positions

Operating Pressure ..... 40 to 115 PSIG (3 to 8 bar)

Ports –
5/32" Instant for Semi-Rigid Nylon or Polyurethane Tube
10-32 UNF Available

Temperature –
Operating ..... 32°F to 122°F (0°C to + 50°C)
Storage ..... -22°F to 140°F (-30°C to + 60°C)

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Operator Specifications

	PXCM111	PXCM121	PXCM521
Differential Travel at 90 PSI (6 bar)	.006" (0.15 mm)	.012" (0.3 mm)	.020" (0.5 mm)
Maximum Travel (B) at 90 PSIG (6 bar)	.055" (1.4 mm)	.126" (3.2 mm)	.228" (5.8 mm)
Minimum Pre-Travel (A) at 90 PSIG (6 bar)	.035" (0.9 mm)	.079" (2 mm)	.087" (2.2 mm)
Minimum Operating Force at 90 PSI (6 bar)	2.5 lb (11 N)	1.0 lb (4.5 N)	1.6 lb (7 N)
Operating Diagram	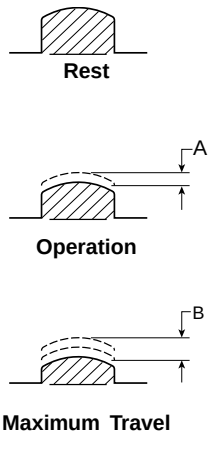	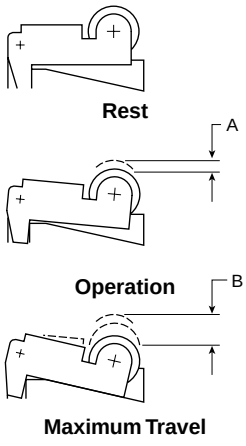	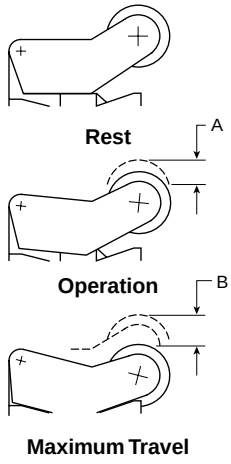

Dimensions

PXCM111

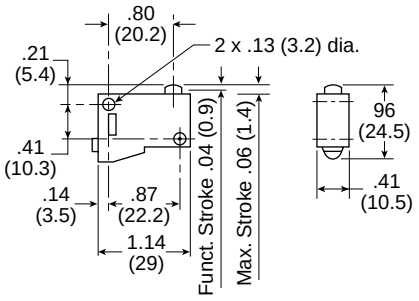

PXCZ12

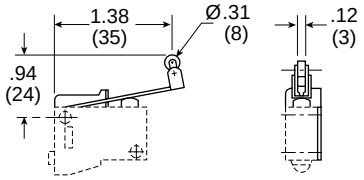

PXCZ11

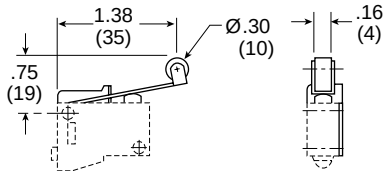

PXCM121, PXCM131

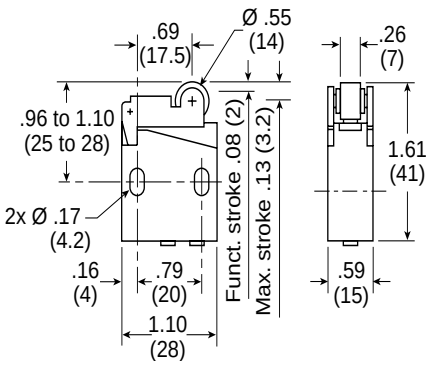

PXCM521

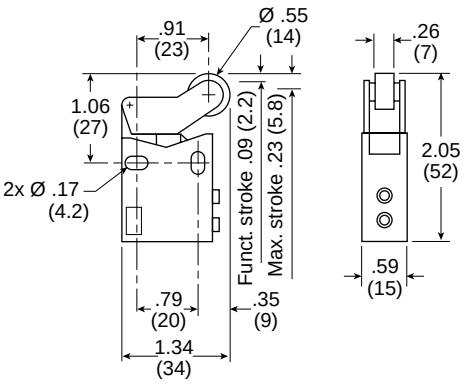

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Pilot Operated Compact Limit Switches

5/32" Instant Connections
Pipeable Exhaust Port
7/64" I.D. Internal Orifice

PXCM601A110

PXCM601A102

PXCM601A103

Part Number	Actuator	Type of Switching*
PXCM601A110	Steel Plunger Operating Levers Available (See Below)	NNP
PXCM601A102	Steel Roller Plunger	
PXCM601A103	90° Steel Roller Plunger	

Specifications

Air Quality –
Standard Shop Air, Lubricated or Dry, 40µm Filtration

Flow SCFM (Nl/min) 8.8 (250)

Materials –
Body ..... Zinc Alloy
Poppets ..... Polyurethane
Seals ..... Nitrile (Buna N)

Maximal Operating Frequency ..... 5 Hz

Nominal Bore Ø ..... 7/64" (2.5 mm)

Number of Operations with Dry Air at 90 PSI (6 bar) and 68°F (20°C) – Frequency 1 Hz ..... 10 Million

Operating Positions ..... All Positions

Operating Pressure ..... 40 to 115 PSIG (3 to 8 bar)

Ports –
5/32" Instant for Semi-Rigid Nylon or Polyurethane Tube

Temperature –
Operating ..... 32°F to 122°F (0°C to + 50°C)
Storage ..... -22°F to 140°F (-30°C to + 60°C)

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Operator Specifications

	PXCM601A110	PXCM601A102	PXCM601A103	PXCM601A110 + XCMZ24
Differential Travel at 90 PSI (6 bar)	.012" (0.3 mm)	.008" (0.2 mm)	.020" (0.5 mm)	.047" (1.2 mm) (A)
Maximum Travel (B) at 90 PSIG (6 bar)	.197" (5 mm)	.197" (5 mm)	.197" (5 mm)	—
Minimum Pre-Travel (A) at 90 PSIG (6 bar)	.066" (1.7 mm)	.066" (1.7 mm)	.066" (1.7 mm)	.370" (9.4 mm) (A)
Minimum Operating Force at 90 PSI (6 bar)	5.4 lbf (24 N)	5.2 lbf (23 N)	5.2 lbf (23)	4.3 lbf (19)
Operating Diagram	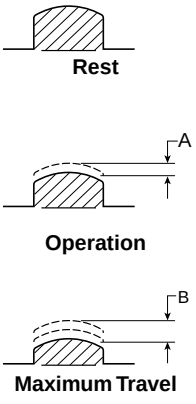			

Dimensions

PXCM601A102

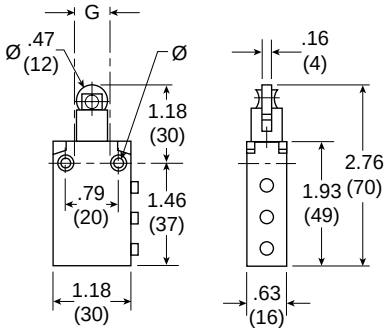

Ø:
2 mounting holes Ø .17" (4.3)
2 countersunk Ø .32" (8.2)
depth 4 mm

G:
top mounting holes, 2 x M5
.71" (18 mm) centers

PXCM601A103

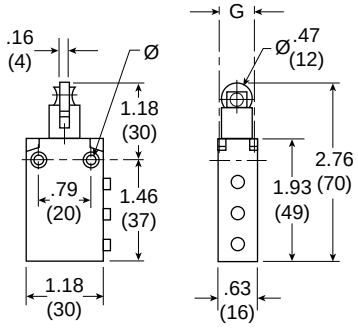

PXCM601A110

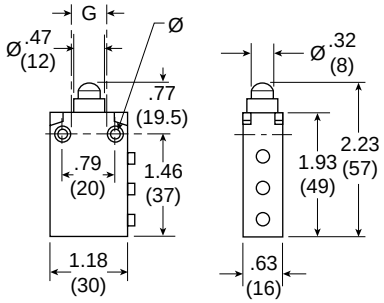

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Limit Switches

Plunger Operated

5/32" Instant Connections
Pipeable Exhaust Port
1/8" I.D. Internal Orifice

PXCK21101 **PXCK21102** **PXCK21121** **PXCK21106**

Complete Assemblies		
Part Number	**Actuator**	**Type of Switching***
PXCK21101	Steel Plunger	NNP
PXCK22101		NP
PXCK21102	Steel Roller Plunger	NNP
PXCK22102		NP
PXCK21121	Plastic Roller Plunger	NNP
PXCK22121		NP
PXCK21106	Cats Whisker	NNP
PXCK22106		NP

Roller Operated

5/32" Instant Connections
Pipeable Exhaust Port
1/8" I.D. Internal Orifice

PXCK2110031 **PXCK2110041**

With Die Cast Rotary Operating Head and Operating Lever - Complete Assemblies		
Part Number	**Actuator**	**Type of Switching***
PXCK2110031	Fixed Delrin Roller Lever Multi-Function Head Actuates: - From Right and Left - From Right - From Left	NNP
PXCK2210031		NP
PXCK2110041	Adjustable Delrin Roller Lever Multi-Function Head Actuates: - From Right and Left - From Right - From Left	NNP
PXCK2210041		NP

NNP: Normally Non-Passing

NP: Normally Passing

Field Conversion of Rotary Operating Head

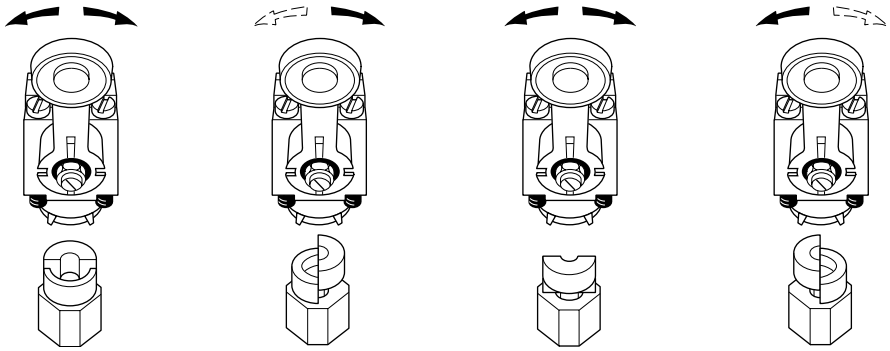

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Separate Pneumatic Switch Bodies

PXCK211

Part Number	Actuator	Type of Switching*
PXCK211	For Use with ZCK Series Operating Heads	NNP
PXCK221		NP

Pneumatic Switch Bodies with Rotary Heads

PXCK21100

Part Number	Actuator	Type of Switching*
PXCK21100	Multi-Function Head Actuates: - From Right and Left - From Right - From Left	NNP
PXCK22100		NP

Operating Heads
For Use With PXCK Switch Bodies

ZCKG00

Part Number	Actuator	Description
Rotary Operated		
ZCKG00	—	Die Cast Zinc
Plunger Operated		
ZCKD02	Roller Plunger	Plunger Operated
ZCKD06	Whisker	
ZCKD10	Rod Plunger	
ZCKD21	Delrin Roller Lever On Plunger	
ZCKD23	Steel Roller Lever On Plunger	

Operating Levers for Rotary Heads

ZCKY81

ZCKY91

For Use With Rotary Head ZCKG00		
Part Number	**Actuator**	**Description**
ZCKY51	Steel 1/8" Square	Rod Levers
ZCKY52	Fiberglas 1/8" Dia. Round	
ZCKY81	Plastic Spring Rod Lever	
ZCKY91	Metal Spring Rod Lever	
ZCKY11	Delrin Roller Lever	Roller Levers
ZCKY13	Steel Roller Lever	
ZCKY41	Adjust. Delrin Roller Lever	
ZCKY43	Adjust. Steel Roller Lever	

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Specifications

Air Quality –
Standard Shop Air, Lubricated or Dry, 40µm Filtration

Flow SCFM (Nl/min) 7.4 (210)

Materials –
Body ..... Zinc Alloy
Poppets ..... Polyurethane
Seals ..... Nitrile (Buna N)

Maximal Operating Frequency ..... 5 Hz

Nominal Bore Ø ..... 1/8" (3 mm)

Number of Operations with Dry Air at 90 PSI (6 bar) and 68°F (20°C) – Frequency 1 Hz ..... 10 Million

Operating Positions ..... All Positions

Operating Pressure ..... 40 to 115 PSIG (3 to 8 bar)

Ports –
5/32" Instant for Semi-Rigid Nylon or Polyurethane Tube

Temperature
Operating ..... 32°F to 122°F (0°C to + 50°C)
Storage ..... -22°F to 140°F (-30°C to +60°C)

Operator Specifications

	PXCK2••01	PXCK2••02	PXCK2••03	PXCK2••06	PXCK2••00 + Actuator
Differential Angle	—	—	—	12°	3°
Differential Travel	.008" (0.2 mm)	.008" (0.2 mm)	.008" (0.2 mm)		
Maximum Angle of Travel	—	—	—	—	80°
Maximum Travel (B) at 90 PSIG (6 bar)	.228" (5.8 mm)	.228" (5.8 mm)	.228" (5.8 mm)	—	—
Minimum Pre-Travel (A) at 90 PSIG (6 bar)	.087" (2.2 mm)	.087" (2.2 mm)	.102" (2.6 mm)	—	—
Minimum Operating Force at 90 PSI (6 bar)	3.6 lbf (16N)	4.5 lbf (20N)	3.4 lbf (15N)	—	—
Minimum Operating Torque at 90 PSI (6 bar)	—	—	—	17.0 oz in (120mNm	29.8 oz in (210mNm)
Operating Angle	—	—	—	35°	31° (Minimum Lever Travel Including Pre-Travel Required For Operation)
Operating Diagram	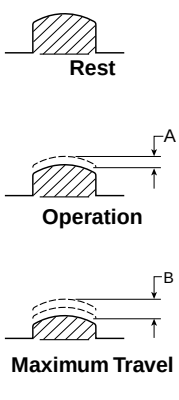		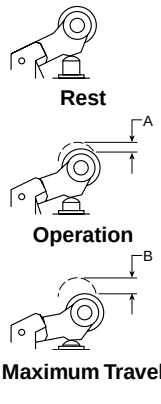		

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Dimensions

PXCK21101, PXCK22101



PXCK21102, PXCK22102



PXCK21121, PXCK22121



PXCK21106, PXCK22106

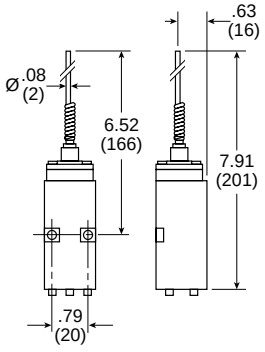

PXCK2110031, PXCK2210031

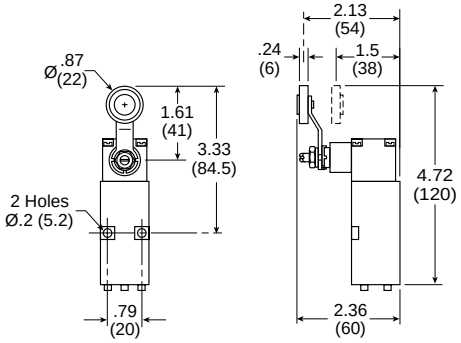

PXCK2110041, PXCK2210041

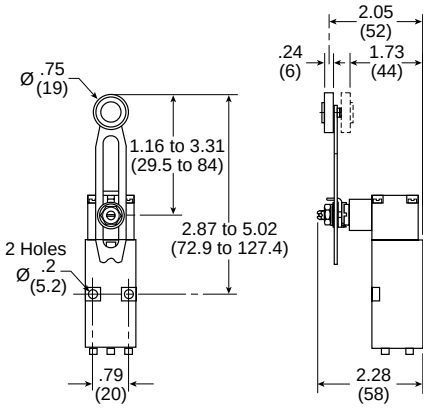

Pneumatic Switch Bodies

PXCK211, PXCK221

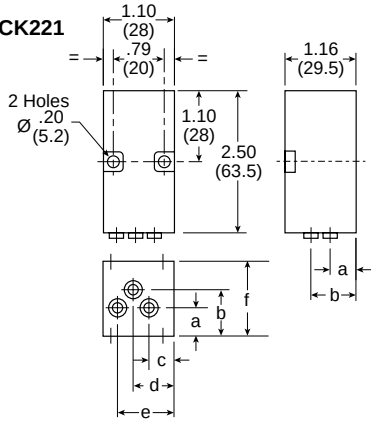

	inch	mm
a	.39	10
b	.77	19.5
c	.35	9
d	.61	15.5
e	.87	22
r	1.66	29.5

Rotary Heads with Operating Levers

ZCKY81



ZCKY91



Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Switch Bodies Only

PXCJ117

Part Number	Type of Switching*
PXCJ117	NNP
PXCJ127	NP

Switch Bodies with Rotary Head

PXCJ11701

Part Number	Direction of Actuation	Type of Switching*
PXCJ11701	Right & Left, Spring Return	NNP
PXCJ11705	Right or Left, Spring Return	
PXCJ12701	Right & Left, Spring Return	NP
PXCJ12705	Right or Left, Spring Return	

Operating Levers for Rotary Heads

ZC2JY11

ZC2JY31

ZC2JY81

ZC2JY91

Die Cast Zinc. For Use With PXCJ Switch Bodies		
Part Number	**Operator**	**Description**
ZC2JY11	Delrin Roller	Spring Return
ZC2JY13	Steel Roller	
ZC2JY21	Offset Delrin Roller	
ZC2JY81	Plastic Spring Rod	
ZC2JY91	Metal Spring Rod	
ZC2JY31	Delrin Roller	Adjustable Roller
ZC2JY41	Offset Delrin Roller	
ZC2JY51		Rod Lever
ZC2JY71	Single Track, Delrin Roller	Fork Lever
ZC2JY61	Double Track, Delrin Rollers	

NNP: Normally Non-Passing

NP: Normally Passing

Top Plunger & Rotary Operating Heads

ZC2JE70

ZC2JE01

Die Cast Zinc. For Use With PXCJ Switch Bodies		
Top Plunger Type		
Part Number	**Operation**	**Description**
ZC2JE61	Top Push	Spring Return
ZC2JE62	Top Roller Push	
ZC2JE63	Side Push	
ZC2JE70	Cat's Whisker	
Rotary Type		
ZC2JE01	From Left & Right	Spring Return
ZC2JE02	Counterclockwise From Right	
ZC2JE03	Clockwise From Left	
ZC2JE05	From Left or Right	
ZC2JE09	Maintained Positions	

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Specifications

Air Quality –
Standard Shop Air, Lubricated or Dry, 40µm Filtration

Flow SCFM (Nl/min) 7.4 (210)

Materials –
Body ..... Zinc Alloy
Poppets ..... Polyurethane
Seals ..... Nitrile (Buna N)

Maximal Operating Frequency ..... 5 Hz

Nominal Bore Ø ..... 1/8" (3 mm)

Number of Operations with Dry Air at 90 PSI (6 bar) and 68°F (20°C) – Frequency 1 Hz ..... 10 Million

Operating Positions ..... All Positions

Operating Pressure ..... 40 to 115 PSIG (3 to 8 bar)

Ports ..... 1/8" NPT

Temperature –
Operating ..... 32°F to 122°F (0°C to + 50°C)
Storage ..... -22°F to 140°F (-30°C to +60°C)

Operator Specifications

	ZC2JE61	ZC2JE62	ZC2JE70	ZC2JE01	ZC2JE05
Differential Angle	—	5°	5°	2°	2°
Differential Travel at 90 PSI (6 bar)	.008" (0.2 mm)	—	—	—	—
Maximum Angle of Travel	—	—	—	75°	75°
Maximum Travel (B) at 90 PSIG (6 bar)	228" (5.8 mm)	—	—	—	—
Minimum Pre-Travel (A) at 90 PSIG (6 bar)	.059" (1.5 mm)	—	—	—	—
Minimum Operating Force at 90 PSI (6 bar)	3.6 lbf (16N)	—	—	—	—
Minimum Operating Torque at 90 PSI (6 bar)	7.1 oz in (50Nm)	35.4 oz in (250Nm)	35.4 oz in (250Nm)	35.4 oz in (250Nm)	—
Operating Angle (Minimum Lever Travel Including Pre-Travel Required For Operation)	—	23°	23°	12°	12°
Operating Diagram	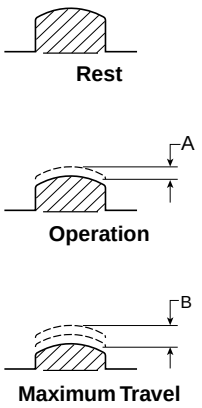				

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Switch Body With Plunger Heads

With ZC2JE61



With ZC2JE62



With ZC2JE70



Switch Body With Rotary Heads and Operating Levers

With ZC2JY11

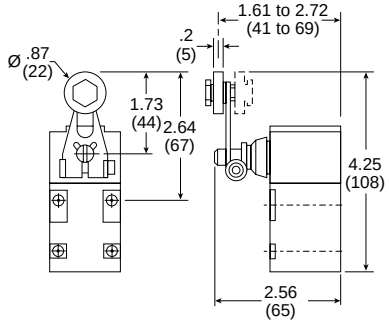

With ZC2JY31

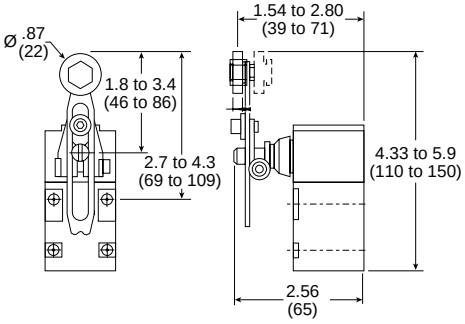

With ZC2JY51

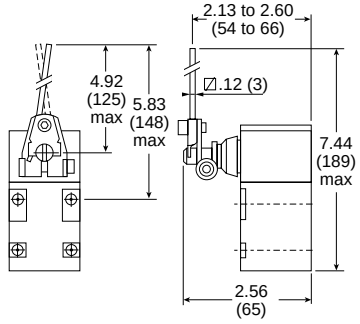

Rotary Heads With Operating Levers

ZC2JY81

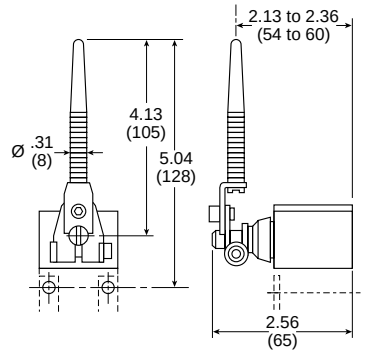

ZC2JY91



ZC2JY41

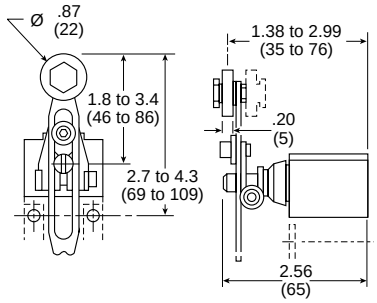

Pneumatic Switch Bodies

PXCJ117, PXCJ127

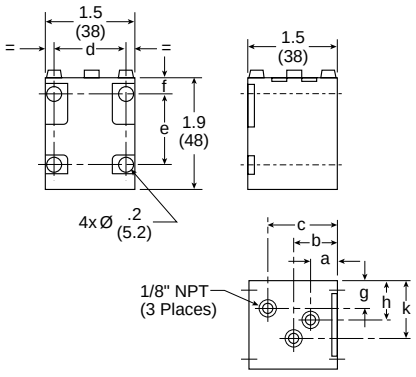

	inch	mm
a	.47	12
b	.75	19
c	1.16	29.5
d	1.14 to 1.18	29 to 30
e	1.18	30
f	.28	7
g	.43	11
h	.51	13
k	.94	24

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Blocking Valves

The blocking valve is a single acting spring return 2/2 valve in a fitting format. The device requires a pneumatic pilot signal to open, which allows free flow of air or neutral gas. As long as a pilot signal is present, the device will remain open. When the pilot signal is removed, the internal spring will close the blocking valve, bubble tight.

These devices have two primary design uses: (1) to prevent unwanted gravity induced motion in cylinders during shut down procedures or during periods of lost supply pressure and (2) freezing the cylinder position by using a blocking valve at each end of the cylinder. Application needs such as tool or work piece protection, horizontal indexing or inspection stops are often satisfied by these devices.

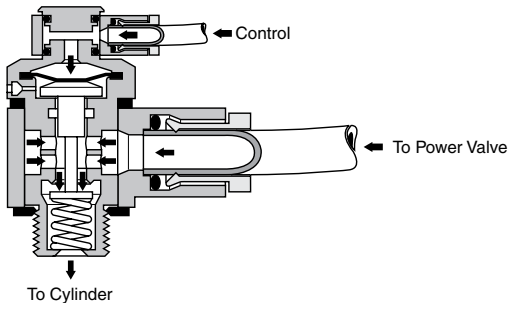

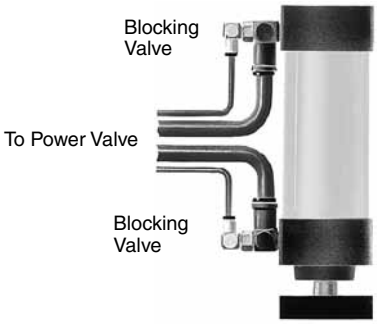

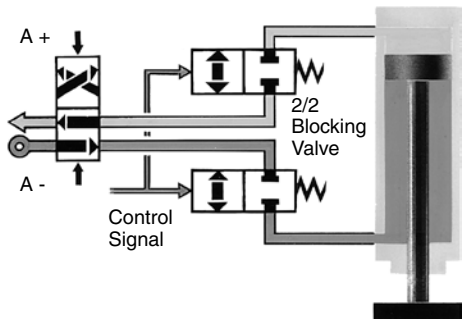

PWBA General Characteristics

Operating Pressure	0 to 150 PSI
Permissible Fluids	Air or neutral gas, 50 µm filtration, lubricated or not
Operating Temperature	5° to 140°F (-15° to 60°C)
Storage Temperature	-40° to 160°F (-40° to 70°C)
Flow	See page w15
Mechanical Life	10 Million
Maximum Operating Frequency	10Hz
Material: Body	Zinc alloy
Mounting Screw	Brass
Maximum Mounting Torque: 10-32 UNF and M5	88 inch pounds
1/8"	70 inch pounds
1/4"	105 inch pounds
3/8"	265 inch pounds
1/2"	310 inch pounds
Adjustment	N/A
Adjustment Locking	N/A

Piloting and De-Piloting Pressure

Blocking Valve Sizes	**Pilot with Operating Pressure of:**			
	30 PSI	**60 PSI**	**90 PSI**	**120 PSI**
1/8" BSP or NPT	33 PSI	40 PSI	45 PSI	50 PSI
1/4" BSP or NPT	33 PSI	40 PSI	45 PSI	50 PSI
3/8" BSP or NPT	35 PSI	40 PSI	45 PSI	50 PSI
1/2" BSP or NPT	45 PSI	50 PSI	55 PSI	60 PSI
Blocking Valve Sizes	**Depilot with Operating Pressure of:**			
	30 PSI	**60 PSI**	**90 PSI**	**120 PSI**
1/8" BSP or NPT	20 PSI	25 PSI	30 PSI	34 PSI
1/4" BSP or NPT	20 PSI	25 PSI	30 PSI	34 PSI
3/8" BSP or NPT	20 PSI	25 PSI	30 PSI	34 PSI
1/2" BSP or NPT	25 PSI	30 PSI	34 PSI	40 PSI

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

For Cylinder Mounting
(Can also be mounted in Threshold Sensor Banjo)

With Instant Tube Fittings

PWBA3469

Symbol	BSP Connection for Pilot	BSP Cylinder Port Thread (Male)	BSP Connection for Tube	BSP Catalog Number	NPT Connection for Pilot	NPT Cylinder Port Thread (Male)	NPT Connection for Tube	NPT Catalog Number
	4mm Tube	1/8"	6mm	PWBA1468	5/32" Tube	1/8"	1/4"	PWBA3468
		1/4"	6mm	PWBA1469		1/4"	1/4"	PWBA3469
		1/4"	8mm	PWBA1489				
		3/8"	8mm	PWBA1483		3/8"	3/8"	PWBA3493
		3/8"	10mm	PWBA1493				
		1/2"	12mm	PWBA1412		1/2"	1/2"	PWBA3412

With Threaded Connections and Tube Pilot Port

PWBA3833

Symbol	BSP Connection for Pilot	BSP Cylinder Port Thread (Male)	BSP Connection from Valve (Female)	BSP Catalog Number	NPT Connection for Pilot	NPT Cylinder Port Thread (Male)	NPT Connection from Valve (Female)	NPT Catalog Number
	4mm Tube	1/8"	1/4"	PWBA1898	5/32" * Tube	1/8"	1/8"	PWBA3888
		1/4"	1/4"	PWBA1899		1/4"	1/4"	PWBA3899
	M5 Female	3/8"	3/8"	PWBA1833	5/32" * Tube	3/8"	3/8"	PWBA3833
		1/2"	1/2"	PWBA1822		1/2"	1/2"	PWBA3822

* Instant fitting

With Threaded Connections and Threaded Pilot Port

PWBA14/34



NPT Connection for Pilot	NPT Cylinder Port Thread (Male)	NPT Connection from Valve	NPT Catalog Number
1/8" pipe	1/8"	1/8"	PWBA38887
	1/4"	1/4"	PWBA38997
	3/8"	3/8"	PWBA38337
	1/2"	1/2"	PWBA38227

PWBA18/38



PWBA38



Dimensions: Inches (mm)

	Flow*	ØA	B	C	K	H	L
PWBA1468/3468	14.8	0.86" (22)	0.82" (21)	0.94" (24)	0.53" (13.5)	2.32" (59)	1.54" (39)
PWBA1469/3469 PWBA1489	19.4	0.86" (22)	0.82" (21)	0.94" (24)	0.53" (13.5)	2.09" (53)	1.54" (39)
PWBA1483 PWBA1493/3493	45.9	1.06""(27)	1.10" (28)	0.94" (24)	0.55" (14)	2.09" (53)	1.98" (50)
PWBA1412/3412	81.2	1.22" (31)	1.30" (33)	1.30" (33)	0.94" (24)	2.59" (66)	2.59" (66)
PWBA1898/3888	14.8	0.86" (22)	0.82" (21)	0.94" (24)	0.53" (13.5)	2.32" (59)	1.71" (43.5)
PWBA1899/3899	19.4	0.86" (22)	0.82" (21)	0.94" (24)	0.53" (13.5)	2.09" (53)	1.71" (43.5)
PWBA1833/3833	45.9	1.06" (27)	1.10" (28)	0.94" (24)	0.55" (14)	2.09" (53)	2.18" (55)
PWBA1822/3822	81.2	1.22" (31)	1.30" (33)	1.30" (33)	0.94" (24)	2.59" (66)	2.47" (63)
PWBA38887	14.8	0.75" (19)	0.87" (22)	0.83" (21)	0.67" (17)	2.20" (56)	1.73" (44)
PWBA38997	19.4	0.75" (19)	0.87" (22)	0.83" (21)	0.67" (17)	2.20" (56)	1.73" (44)
PWBA38337	45.9	1.06" (27)	1.18" (30)	1.06" (27)	0.91" (23)	2.64" (67)	1.42" (36)
PWBA38227	81.2	1.06" (27)	1.18" (30)	1.06" (27)	0.91" (23)	2.64" (67)	1.42" (36)

*SCFM at 90 PSI

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

General Description

Threshold Sensors – PWS

The plug-in threshold sensors provide feedback information on pneumatic cylinder status in one of three possible outputs . . . pneumatic, electric, or electronic. Mounted into the cylinder port, these devices monitor the back pressure of the cylinder's exhaust. When the cylinder's piston stops, the back pressure rapidly drops and the threshold sensor provides the desired output. Ideal for variable stroke applications such as robotics where other sensor type devices such as limit switches are impractical, these devices provide a signal whenever the cylinder stops motion.

The threshold sensor consists of two complementary sub assemblies (1) the banjo fitting and (2) the plug-in sensor element. In all cases, the sensor is easily plugged into the banjo fitting and locked in place with a spring clip. The banjo fitting is designed to accept (piggy backed) other functional fittings such as flow controls or blocking valves. Simply select the sensor based on the type feedback signal that best fits the application.

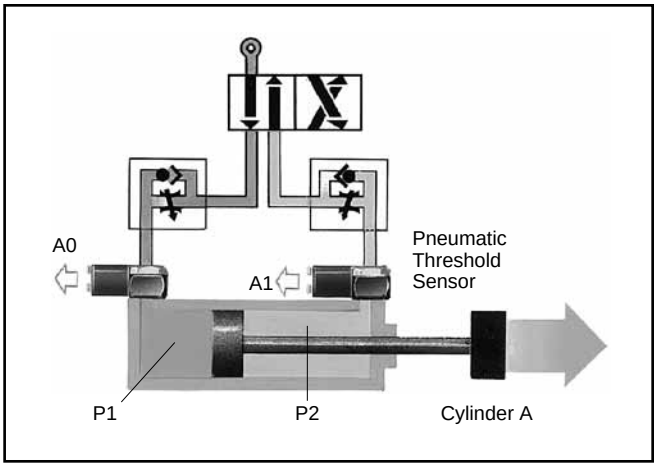

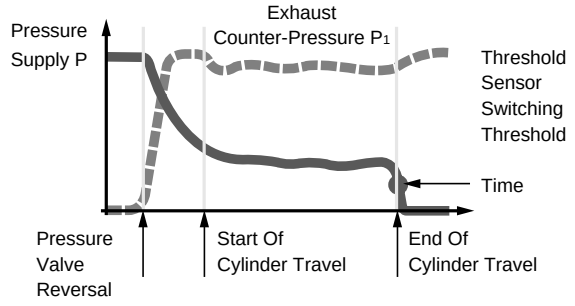

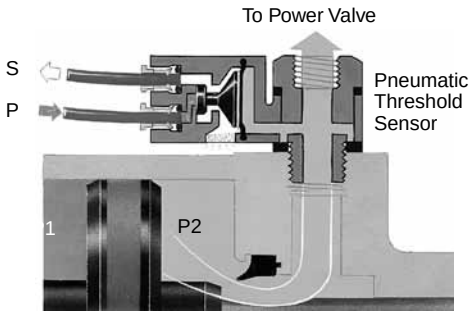

PWS General Characteristics

Operating Pressure	0 to 150 PSI
Permissible Fluids	Air or neutral gas, 50 µm filtration, lubricated or not
Operating Temperature	5° to 140°F (-15° to 60°C)
Storage Temperature	-40° to 160°F (-40° to 70°C)
Flow	N/A
Mechanical Life	10 Million
Maximum Operating Frequency	10Hz
Material: Body	Thermoplastic
Mounting Screw	Brass
Maximum Mounting Torque: 10-32 UNF and M5	88 inch pounds
1/8"	70 inch pounds
1/4"	105 inch pounds
3/8"	265 inch pounds
1/2"	310 inch pounds
Adjustment	N/A
Adjustment Locking	N/A

Piloting and De-Piloting Pressure

Threshold Sensors	Pilot with Operating Pressure of 90 PSI	Depilot with Operating Pressure of 90 PSI
PWSP111	64 PSI	6 PSI
PWSM1012	15 PSI	9 PSI
PWSE101 and PWSE111	10 PSI	7 PSI

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Model Selection

Banjo Sockets (with Sensor Clip)		
Port Size	**Model Number**	**Wrench**
10-32	**PWSB1557**	5/16" Hex
1/8"	**PWSB1887**	3/16" Allen
1/4"	**PWSB1997**	5/16" Allen
3/8"	**PWSB1337**	3/8" Allen
1/2"	**PWSB1227**	1/2" Allen

Plug-in Sensors		
Output	**Model Number**	**Connection**
Pneumatic	**PWSP111**	5/32" push-in
Electrical	**PWSM1012**	3-wire cable (6 ft)

Application

The threshold sensor provides electrical or pneumatic feedback information on pneumatic (air) cylinder status. These devices monitor the back pressure of the cylinder's exhausting chamber. When the cylinder stops, the back pressure drops and the threshold sensor provides the desired output. Ideal for variable stroke applications. The banjo fitting and the feedback element are two separate subassemblies, giving the user flexibility between electrical and pneumatic outputs as feedback.

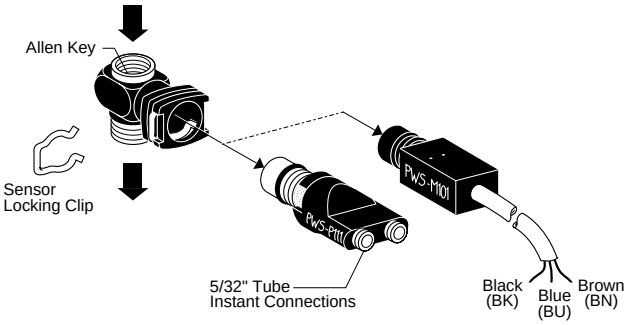

Mounting

Banjo fittings in 10-32 to 1/2" pipe sizes are designed to be installed directly into actuator ports (up to 5" bore cylinders). The banjo fitting can accommodate other functional fittings and components such as right angle flow control valves or blocking valves. Banjo fittings screw into actuators using an Allen wrench or 5/16" hex head wrench for 10-32 size. Electrical or pneumatic feedback element snaps into place using a locking clip.

Operation

Pneumatic sensors have a continuous pressure signal applied to the sensor device. Electrical sensors have a continuous electrical signal applied to the sensor device. The threshold sensor assembly mounted directly into the cylinder Port provides an output signal S, which can be pneumatic or electrical, when the falling back pressure in the exhausting chamber of the cylinder reaches the operating threshold (approximately 6-9 PSIG). (The device is a normally passing device. The output is only on when there is nearly zero pressure at the cylinder.)

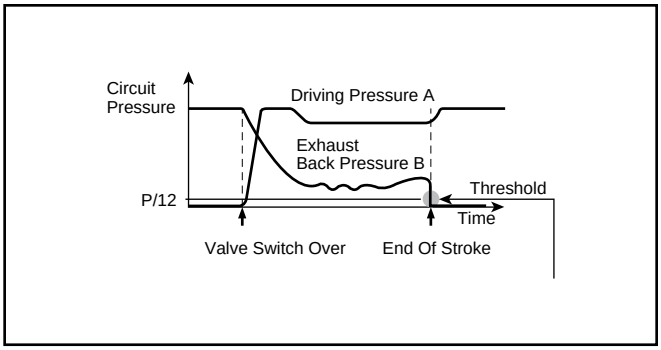

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Dimensions



Banjo Socket



PWSP111



PWSM1012

Model	A	B	C	H	K	L
PWSB1557	.98 (25)	.43 (11)	5/16" Hex	.79 (20)	.40 (10)	.67 (17)
PWSB1887	.98" (25)	.63 (16)	3/16" Allen	.71 (18)	.40 (10)	.79 (20)
PWSB1997	.98 (25)	.83 (21)	5/16" Allen	.71 (18)	.40 (10)	.87 (22)
PWSB1337	.98 (25)	1.10 (28)	3/8" Allen	.79 (20)	.47 (12)	.98 (25)
PWSB1227	.98 (25)	1.30 (33)	1/2" Allen	.93 (24)	.55 (14)	1.02 (26)

inches
(mm)

Specifications

Operating Pressure ..... 0 to 150 PSIG (0 to 10 bar)

Temperature Range .....5°F to 140°F (-15°C to 60°C)

⚠ ***CAUTION:*** **If it is possible that the ambient temperature may fall below freezing, the medium must be moisture free to prevent internal damage or unpredictable behavior.**

Maximum Operating Frequency ..... 10 Hz

Pilot Pressure (PWSP111) ..... >64 PSIG (4.4 bar)

Threshold Pressure ..... 6 to 9 PSIG (.4 to .6 bar)

Output Flow Rate (PWSP111) .....3 SCFM at 90 PSIG

Current Rating (PWSM1012) –
5 VA, 250 VAC
5W, 48 VAC

Materials –
Body ..... Thermoplastic
Mounting Screw & Threads ..... Brass

Life Expectancy –
10 million cycles with dry air at 90 PSIG, 68°F, and 1 Hz operating frequency

Voltage Range (PWSM1012) –
12 - 240 VAC
12 - 48 VDC

Fluid Power			Universal Description	Electrical	
Function	Symbol			Function	Symbol
Normally Closed (N.C.)	2-Way	3-Way	Normally Non-Passing (NNP)	Normally Open (N.O.)	
Normally Open (N.O.)	2-Way	3-Way	Normally Passing (NP)	Normally Closed (N.C.)	

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Integrated Fittings

Section G

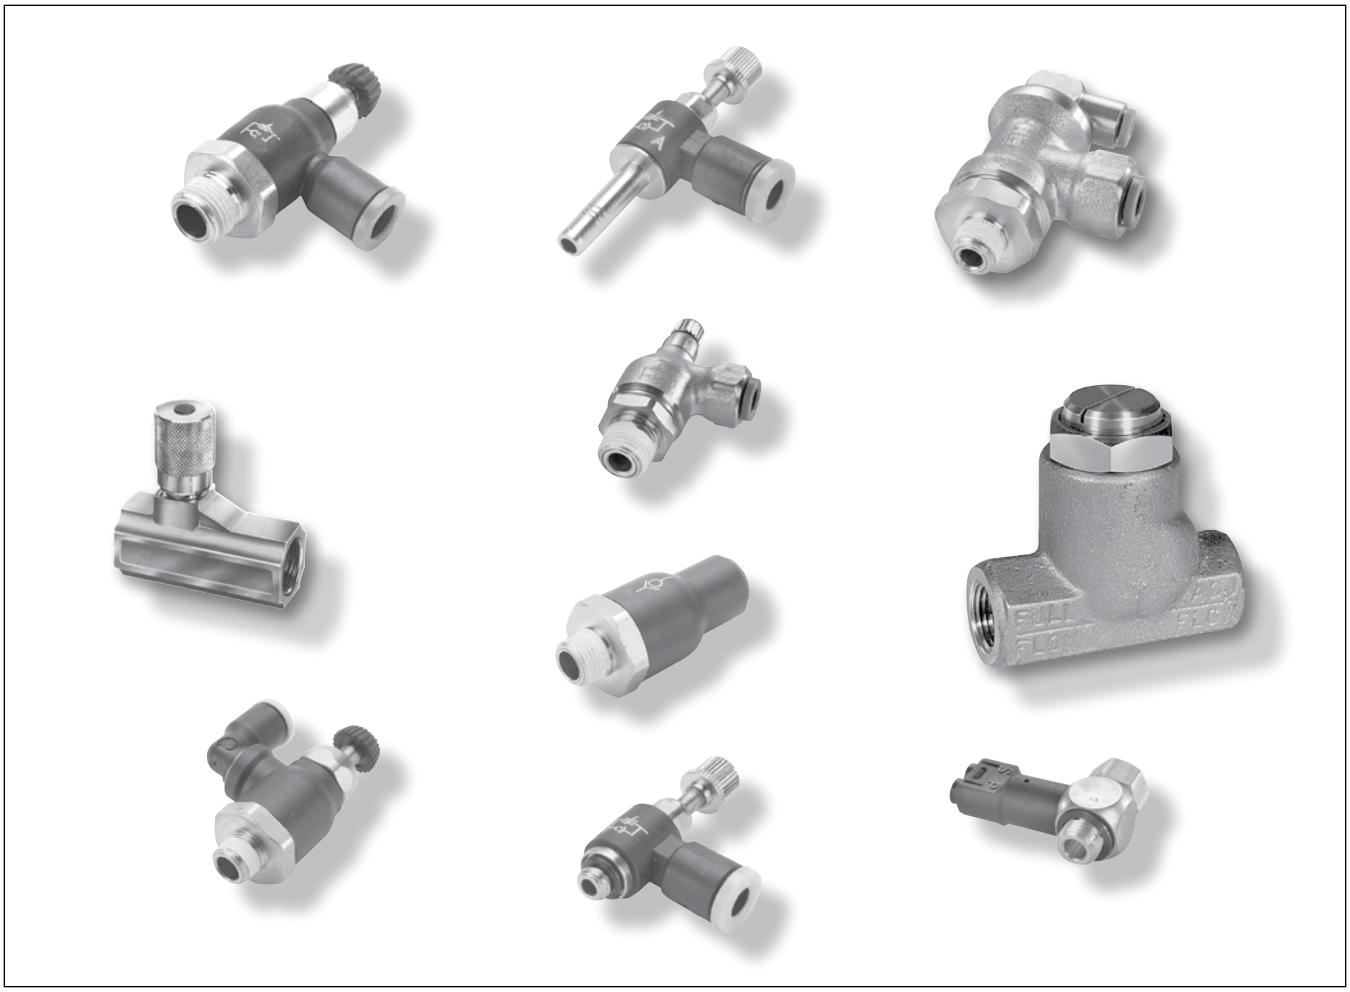

Product Index G34-G35
Compact Flow Control Valves G36-G37
Miniature Flow Control Valves G38-G39
Swivel Outlet Flow Control Valves.....G40-G41
Plug-in Flow Control Valves.....G42-G43
In-line Flow Control Valves G44-G47
Compact Metal Flow Control Valves.....G48-G49
Flow Control Check Valves.....G50-G52
Blocking Flow Controls Valves.....G54-G55
Threshold Sensor G56-G57

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Compact Flow Control Valves	**FCC731** Meter Out Page G36	**FC731** Meter Out - BSPP Page G37	**FCCB731** Bi-Directional Flow Control Page G37	**FCCB731** Bi-directional Flow Control - BSPP Page G37	**FCKC731** Knobless Meter Out Flow Control Page G37
FCKC731 Knobless Flow Control - BSPP Page G37	**FCKCB731** Knobless Bi-directional Flow Control - BSPP Page G37	**Miniature Fow Control Valves**	**FCM731** Meter Out Flow Control Page G39	**FCM731** Flow Control - BSPP Page G39	**FCMB731** Bi-directional Flow Control - BSPP Page G39
FCMK731 Knobless Mini Meter Out Flow Control Page G39	**Swivel Outlet Flow Control Valves**	**FCCS731** Compact Swivel Outlet Flow Control Page G41	**FCMS731** Mini Swivel Outlet Flow Control Page G41	**FCMS731** Miniature Swivel Outlet - BSPP Page G41	**FCCS731** Compact Swivel Outlet - BSPP Page G41
Plug-In Flow Control Valves	**FCMSP731** Mini Flow Control Page G43	**FCMSP701** Miniature Flow Control Page G43	**FCCSP731** Compact Flow Control Page G43	**In-Line Flow Control Valves**	**FC832** Flow Control Page G45
FCB832 Bi-directional Flow Control Page G45	**FC832** Flow Control Page G45	**FCB832** Bi-directional Flow Control Page G45	**FCPM832** Panel Mountable Flow Control Page G45	**FC836** Threaded Flow Control Page G45	**FC836** Threaded Flow Control - BSPP Page G46
337 Series Micrometer Flow Control Valves Page G46	**337 Series** Micrometer Flow Control Valves - BSPP Page G46	**338 Series** Bi-directional Flow Control Valves Page G46	**338 Series** Bi-directional Flow Control Valves - BSPP Page G46	**3250 Series** Flow Control Valves Page G46	**3250 Series** Flow Control Valves - BSPP Page G47
3250 Series Flow Control Valves Page G47	**3250 Series** Flow Control Valves - BSPP Page G47	**Compact Metal Flow Control Valves**	**3251 Series** Right Angle Flow Control Valves Page G49	**FC705** Push-to-Connect Metal Flow Control Page G49	**FC701** Push-to-Connect Metal Flow Control - BSPP Page G49
FC708 Threaded Port Meter Out Flow Control Page G49	**FC702** Threaded Port Metal Flow Control - BSPP Page G49	**Flow Control Check Valves**	**32PLCK** In-Line Check Valve Page G51	**32PLCK** In-Line Check Valve Page G51	**W68PLCK** Male Check Valve Page G51

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

W68PLCKI Male Check Valve Meter In Page G51	**68PLCK** Male Check Valve Meter Out - BSPP Page G51	**68PLCKI** Male Check Valve Meter In - BSPP Page G51	**VC** Check Valve Page G51	**339 Series** Check Valve Page G52	**339 Series** Check Valve - BSPP Page G52
3047 Series Check Valve Page G52	**Blocking Flow Control Valves**	**FC601** Push-to-Connect Lock Out Valves Page G55	**FC601** Push-to-Connect Lock-Out Valve - BSPP Page G55	**FC602** Threaded Port Lock Out Valves Page G55	**FC608** Threaded Port Lock-Out Valve - BSPP Page G55
Threshold Sensor	**PSBJ731** Pneumatic - 5/32 Pilot Page G57	**PSBJ731** Pneumatic - 4mm Pilot Page G57	**PSPJ731** Pneumatic - 10-32 Pilot Page G57	**PSBJ708** Pneumatic - M5 Pilot Page G57	**PSPE701** Pneumati / Electric - BSPP Page G57

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Materials Of Construction	
Body (Depending upon the Model):	• Glass reinforced nylon 6.6 • Brass
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Base:	Nickel-plated brass

Nomenclature	
Example:FCC731-4-2	**Attribute:**
FC	Flow control
C	Compact
7	Right angle
3	Nylon body
1	Tube x Pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread

Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4, 3/8
Tube O.D. (mm)	4, 6, 8, 10, 12

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

Compact flow control regulators ensure excellent performance of flow and are perfectly suited for reduced spaces due to their small size. The sensitivity of the adjustment screw provides very precise air flow control and regulation. A locking nut guarantees stability of adjustment against vibration tampering of the flow setting.



FCC731 Compact Meter Out

Part No.	Tube Size (In)	NPT	Hex 1 (In)	Hex 2 (In)	H Open	H Closed	L
FCC731-5/32-2	5/32	1/8	0.63	0.39	1.67	1.44	0.85
FCC731-5/32-4	5/32	1/4	0.63	0.39	1.67	1.44	0.85
FCC731-4-2	1/4	1/8	0.63	0.39	1.67	1.44	0.85
FCC731-4-4	1/4	1/4	0.63	0.39	1.67	1.44	0.85
FCC731-6-4	3/8	1/4	0.91	0.67	2.03	1.71	1.22
FCC731-6-6	3/8	3/8	0.91	0.67	2.03	1.71	1.22



FC731 Compact Meter Out - BSPP

Part No.	Tube Size (mm)	BSPT	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	L
FC731-4M-2G	4	1/8	10	16	38.0	44.0	22.0
FC731-6M-2G	6	1/8	10	16	38.0	44.0	22.0
FC731-6M-4G	6	1/4	10	16	36.5	42.5	22.0
FC731-8M-2G	8	1/8	14	19	41.5	48.0	28.0
FC731-8M-4G	8	1/4	14	19	41.5	48.0	28.0
FC731-8M-6G	8	3/8	14	19	41.5	48.0	28.0
FC731-10M-4G	10	1/4	17	23	45.5	53.5	31.5
FC731-10M-6G	10	3/8	17	23	45.5	54.0	31.5
FC731-12M-6G	12	3/8	17	23	45.5	54.0	35.0
FC731-12M-8G	12	1/2	17	24	45.5	54.0	35.0

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

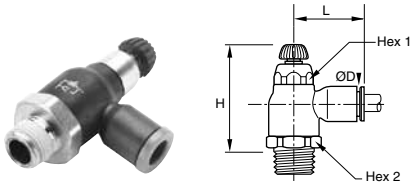

FCCB731 Compact Bi-Directional Flow Control

Part No.	Tube Size (In)	NPT	Hex 1 (In)	Hex 2 (In)	H Open	H Closed	L
FCCB731-5/32-2	5/32	1/8	0.63	0.39	1.67	1.44	0.85
FCCB731-4-2	1/4	1/8	0.63	0.39	1.67	1.44	0.85
FCCB731-4-4	1/4	1/4	0.63	0.39	1.67	1.44	0.85

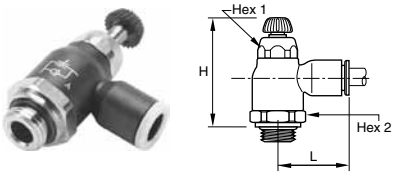

FCCB731 Compact Bi-directional Flow Control - BSPP

Part No.	Tube Size (mm)	BSPP	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	L
FCCB731-4M-2G	4	1/8	10	16	38.0	44.0	22.0
FCCB731-6M-2G	6	1/8	10	16	38.0	44.0	22.0
FCCB731-6M-4G	6	1/4	10	16	36.5	42.5	22.0
FCCB731-8M-2G	8	1/8	14	19	41.5	48.0	28.0
FCCB731-8M-4G	8	1/4	14	19	41.5	48.0	28.0
FCCB731-8M-6G	8	3/8	14	19	41.5	48.0	28.0

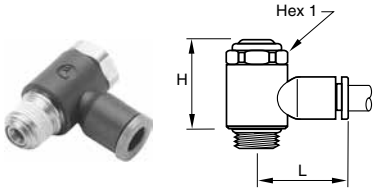

FCKC731 Knobless Meter Out Flow Control

Part No.	Tube Size (In)	NPT / UNF	Hex 1 (mm)	H	L
FCKC731-2-0	1/8	10-32		0.69	0.65
FCKC731-2-2	1/8	1/8	13	0.79	0.75
FCKC731-5/32-0	5/32	10-32		0.69	0.65
FCKC731-5/32-2	5/32	1/8	13	0.79	0.75
FCKC731-4-0	1/4	10-32		0.69	0.77
FCKC731-4-2	1/4	1/8	13	0.79	0.85
FCKC731-4-4	1/4	1/4	17	1.04	0.89
FCKC731-5-2	5/16	1/8	13	0.79	1.02
FCKC731-5-4	5/16	1/4	17	1.04	1.06
FCKC731-6-4	3/8	1/4	17	1.04	1.14
FCKC731-6-6	3/8	3/8	20	1.14	1.36

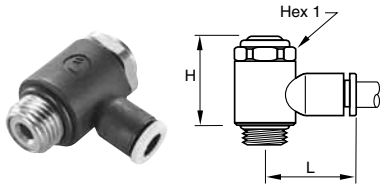

FCKC731 Knobless Compact Flow Control - BSPP

Part No.	Tube Size (mm)	BSPP / M5	Hex 1 (mm)	H	L
FCKC731-4M-M5	4	M5X0.8	8.0	17.5	17.0
FCKC731-4M-2G	4	1/8	13.0	25.0	19.0
FCKC731-6M-M5	6	M5X0.8	8.0	17.5	19.0
FCKC731-6M-2G	6	1/8	13.0	25.0	21.0
FCKC731-6M-4G	6	1/4	17.0	26.5	22.0
FCKC731-8M-2G	8	1/8	13.0	25.0	26.0
FCKC731-8M-4G	8	1/4	17.0	26.5	27.0
FCKC731-8M-6G	8	3/8	20.0	37.5	29.0
FCKC731-10M-4G	10	1/4	17.0	26.5	29.0
FCKC731-10M-6G	10	3/8	20.0	37.5	31.0
FCKC731-10M-8G	10	1/2	23.0	43.0	37.0
FCKC731-12M-6G	12	3/8	20.0	37.5	6.8
FCKC731-12M-8G	12	1/2	23.0	43.0	37.0

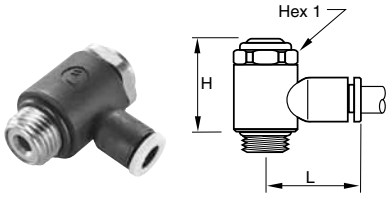

FCKCB731 Knobless Bi-directional Flow Control - BSPP

Part No.	Tube Size (mm)	BSPP / M5	Hex 1 (mm)	H	L
FCKCB731-4M-M5	4	M5X0.8	8	17.5	17.0
FCKCB731-4M-2G	4	1/8	13	25.0	19.0
FCKCB731-6M-M5	6	M5X0.8	8	17.5	19.0
FCKCB731-6M-2G	6	1/8	13	25.0	21.0
FCKCB731-6M-4G	6	1/4	17	26.5	22.0
FCKCB731-8M-2G	8	1/8	13	25.0	26.0
FCKCB731-8M-4G	8	1/4	17	26.5	27.0
FCKCB731-8M-6G	8	3/8	20	37.5	29.0

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Materials of Construction	
Body (Depending upon the Model):	• Glass reinforced nylon 6.6 • Brass
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Base:	Nickel-plated brass

Nomenclature	
Example: FCM731-4-2	**Attribute:**
FC	Flow control
M	Miniature
7	Right angle
3	Nylon body
1	Tube x pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread

Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4
Tube O.D. (mm)	3, 4, 6, 8

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

The miniature flow control regulator is especially adapted for all very small sized pneumatic applications (micro-pneumatic in particular). They are specifically designed for use with small bore cylinders (pancake / flat cylinders). Miniature flow control regulators are available in meter out, meter in and bi-directional versions.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics



FCM731 Miniature Meter Out Flow Control

Part No.	Tube Size (In)	NPT	Hex 1 mm	H Open	H Closed	L
FCM731-2-0	1/8	10-32	6	1.14	0.91	0.67
FCM731-2-2	1/8	1/8	7	1.41	1.26	0.69
FCM731-5/32-0	5/32	10-32	6	1.02	0.93	0.67
FCM731-5/32-2	5/32	1/8	7	1.16	1.06	0.71
FCM731-4-0	1/4	10-32	6	1.02	0.93	0.73
FCM731-4-2	1/4	1/8	7	1.16	1.06	0.75
FCM731-4-4	1/4	1/4	8	1.28	1.18	0.77



FCMK731 Knobless Mini Meter Out Flow Control

Part No.	Tube Size (In)	NPT	Hex 1 mm	H Open	H Closed	L
FCMK731-2-0	1/8	10-32	6	0.79	0.65	0.65
FCMK731-2-2	1/8	1/8	6	0.85	0.71	0.71
FCMK731-5/32-0	5/32	10-32	6	0.79	0.65	0.65
FCMK731-5/32-2	5/32	1/8	6	0.85	0.71	0.71
FCMK731-4-0	1/4	10-32	6	0.79	0.65	0.65
FCMK731-4-2	1/4	1/8	6	0.85	0.71	0.73
FCMK731-4-4	1/4	1/4	6	0.97	0.83	0.73



FCM731 Miniature Flow Control - BSPP

Part No.	Tube Size (mm)	BSPP	Hex 1	H Closed	H Open	L
FCM731-3M-M3	3	M3X0.5	6	23.5	26.0	17.0
FCM731-3M-M5	3	M5X0.8	6	23.5	26.0	17.0
FCM731-4M-M3	4	M3X0.5	6	23.5	26.0	16.5
FCM731-4M-M5	4	M5X0.8	6	23.5	26.0	17.0
FCM731-4M-2G	4	1/8	7	27.0	29.5	18.0
FCM731-6M-M5	6	M5X0.8	6	23.5	26.0	18.0
FCM731-6M-2G	6	1/8	7	27.0	29.5	18.5
FCM731-6M-4G	6	1/4	8	30.0	32.5	19.0
FCM731-8M-2G	8	1/8	13	26.5	31.0	26.0
FCM731-8M-4G	8	1/4	16	29.0	34.0	27.5
FCM731-8M-6G	8	3/8	20	36.0	42.0	29.0



FCMB731 Miniature Bi-directional Flow Control - BSPP

Part No.	Tube Size (mm)	BSPP	Hex 1	H Closed	H Open	L
FCMB731-4M-M5	4	M5X0.8	6	23.5	26.0	16.5
FCMB731-4M-2G	4	1/8	7	27.0	29.5	17.0
FCMB731-6M-M5	6	M5X0.8	6	23.5	26.0	18.0
FCMB731-6M-2G	6	1/8	7	27.0	29.5	18.0
FCMB731-6M-4G	6	1/4	8	30.0	32.5	18.5

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Materials of Construction	
Body:	Glass reinforced nylon 6.6
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Base:	Nickel-plated brass

Nomenclature	
Example: FCMS731-5/32-2	**Attribute:**
FC	Flow control
M	Miniature
S	Swivel outlet
7	Right angle
3	Nylon body
1	Tube x pipe
5/32	5/32 Tube O.D.
2	1/8 Pipe thread

Applicable Tube	
Tube O.D.	5/32, 1/4, 3/8
Tube O.D. (mm)	4, 6, 8, 10, 12

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

Flow control regulators with “swivel outlet” are especially designed to allow a vertical or angled tube exit where access is restricted. The swivel outlet comes with instant push-in connection to ease installation. Flow control regulators with swivel outlet are available in meter out and meter in versions.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics



FCCS731 Compact Swivel Outlet Flow Control

Part No.	Tube Size (In)	NPT	Hex 1 mm	Hex 2 mm	H Closed	H Open	H1	L	L1
FCCS731-4-2	1/4	1/8	19	10	1.87	2.09	0.63	0.93	0.65
FCCS731-4-4	1/4	1/4	19	14	1.79	1.99	0.73	1.00	0.89
FCCS731-6-4	3/8	1/4	23	17	1.93	2.20	1.04	1.34	0.97
FCCS731-6-6	3/8	3/8	23	17	1.93	2.20	1.04	1.34	0.97



FCCS731 Compact Swivel Outlet - BSPP

Part No.	Tube Size (mm)	BSPP	Hex 1 mm	Hex 2 mm	H Closed	H Open	H1	L	L1
FCCS731-6M-2G	6	1/8	16	10	38.0	44.0	16.0	23.5	18.0
FCCS731-6M-4G	6	1/4	16	10	36.5	42.5	16.0	23.5	16.5
FCCS731-8M-2G	8	1/8	19	14	41.5	48.0	23.0	28.0	19.0
FCCS731-8M-4G	8	1/4	19	14	41.5	48.0	23.0	28.0	19.5
FCCS731-8M-6G	10	3/8	19	14	41.5	48.0	23.0	28.0	17.5
FCCS731-10M-4G	10	1/4	23	17	45.5	53.5	26.5	35.0	21.0
FCCS731-10M-6G	10	3/8	23	17	45.5	54.0	26.5	35.0	21.5
FCCS731-12M-6G	12	3/8	23	17	45.5	54.0	31.0	38.0	21.5
FCCS731-12M-8G	12	1/2	23	17	45.5	54.0	31.0	38.0	21.0



FCMS731 Mini Swivel Outlet Flow Control

Part No.	Tube Size (In)	NPT	Hex 1 mm	H Closed	H Open	H1	L	L1
FCMS731-5/32-0	5/32	10-32	6	0.96	1.08	0.55	0.73	0.26
FCMS731-5/32-2	5/32	1/8	8	1.08	1.20	0.55	0.73	0.33



FCMS731 Miniature Swivel Outlet - BSPP

Part No.	Tube Size (mm)	BSPP	Hex 1 mm	H Closed	H Open	H1	L	L1
FCMS731-4M-M5	4	M5X0.8	6	24.5	27.5	14.5	19.5	6.5
FCMS731-4M-2G	4	1/8	7	27.5	31.0	14.5	20.0	8.5
FCMS731-6M-M5	6	M5X0.8	6	24.5	27.5	16.0	21.5	6.5
FCMS731-6M-2G	6	1/8	7	27.5	31.0	16.0	22.0	8.5

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Materials of Construction	
Body:	Glass reinforced nylon 6.6
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Tailpiece:	Nickel-plated brass

Nomenclature	
Example: FCMS731-5/32-2	**Attribute:**
FC	Flow control
M	Miniature
7	Right angle
3	Nylon body
1	Tube x pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread

Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4
Tube O.D. (mm)	4, 6, 8, 10, 12

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

Plug-in flow control regulators can be directly mounted into existing fittings and allow very compact installations. They are particularly suited for mounting in manifolds using cartridges. Their design and function give equal performance to that of flow control regulators with threaded connections.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics



FCMSP731 Plug-In Mini Flow Control

Part No.	Tube Size (In)	Hex 1 mm	H Open	H Closed	H1	H2	L
FCMSP731-2	1/8	6	1.04	0.94	0.12	0.59	0.67
FCMSP731-5/32	5/32	6	1.10	1.00	0.37	0.61	0.67
FCMSP731-4	1/4	7	1.18	1.08	0.12	0.73	0.73



FCMSP701 - Plug-In Miniature Flow Control

Part No.	Tube Size (mm)	Hex 1 mm	H Closed	H Open	H1	H2	L
FCMSP701-4M	4	6	25.5	28.0	9.5	15.5	17.0
FCMSP701-6M	6	7	27.5	29.0	10.5	17.0	18.5



FCCSP731 Plug-In Compact Flow Control

Part No.	Tube Size (mm)	Hex 1 mm	H Closed	H Open	H1	H2	L
FCCSP731-6M	6	10	35.0	41.0	14.0	17.0	22.0
FCCSP731-8M	8	14	39.5	46.5	16.0	21.5	28.0
FCCSP731-10M	10	17	43.5	51.5	17.5	24.5	31.5
FCCSP731-12M	12	17	43.0	51.0	17.0	27.0	31.5

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Materials of Construction	
Body:	Glass reinforced nylon 6.6
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Tailpiece:	Nickel-plated brass

Nomenclature	
Example: FCMS731-5/32-2	**Attribute:**
FC	Flow control
M	Miniature
8	In-line
3	Nylon body
2	Tube x pipe
4	1/4 Tube O.D.

Applicable Tube	
Tube O.D.	5/32, 1/4, 5/16, 3/8, 1/2
Tube O.D. (mm)	4, 6, 8, 10, 12

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

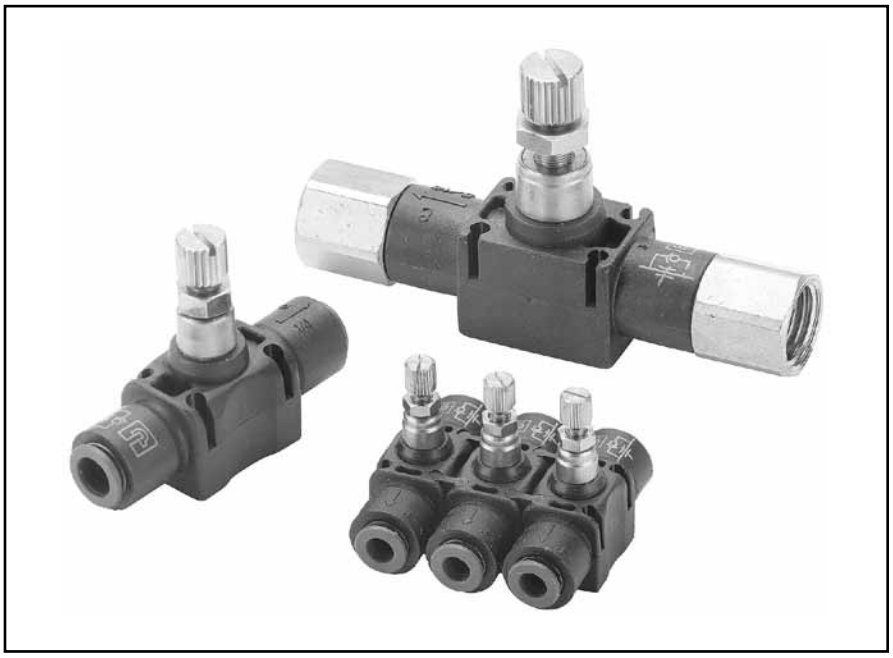

In-line flow controls are unidirectional flow control valves. Intake air flows freely through the flow control; exhaust air is metered out through a specially designed adjustment screw. An arrow on the body of the valve indicates the direction of controlled flow. They can be easily added to existing circuitry. Simply splice it into the cylinder port line.

They can be used individually or they may be stacked together using two joining clips.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics



FC832 In-Line Flow Control

Part No.	Tube Size (In)	Hex 1 mm	H Closed	H Open	K	L	L1	N1	N2	T
FC832-5/32	5/32	5	1.15	1.31	0.47	1.52	0.59	0.31	0.43	0.09
FC832-4	1/4	8	1.54	1.74	0.66	2.00	0.90	0.43	0.66	0.12
FC832-5	5/16	11	1.73	1.97	0.73	2.38	1.02	0.49	0.79	0.13
FC832-6	3/8	14	2.03	2.38	0.94	2.87	1.29	0.62	1.01	1.60
FC832-8	1/2	14	2.24	2.63	1.09	3.35	1.37	0.78	1.07	0.16



FC832 In-Line Flow Control

Part No.	Tube Size (mm)	Hex 1 mm	H Closed	H Open	K	L	L1	N1	N2	T
FC832-4M	4	5	29.5	33.5	12.0	39.0	15.0	8.0	11.0	2.2
FC832-6M	6	8	39.5	44.5	17.0	54.0	23.0	11.0	17.0	3.2
FC832-8M	8	11	44.0	50.0	18.5	60.5	26.0	12.5	20.0	3.2
FC832-10M	10	14	52.0	61.0	24.0	76.0	33.0	16.0	26.0	4.2
FC832-12M	12	14	57.5	67.5	28.0	86.0	35.0	20.0	27.5	4.2



FCB832 In-Line Bi-directional Flow Control

Part No.	Tube Size (In)	Hex 1 mm	H Closed	H Open	K	L	L1	N1	N2	T
FCB832-5/32	5/32	5	1.15	1.31	0.47	1.52	0.59	0.31	0.43	0.09
FCB832-4	1/4	8	1.54	1.74	0.66	2.00	0.90	0.43	0.66	0.12
FCB832-5	5/16	11	1.73	1.97	0.73	2.38	1.02	0.49	0.79	0.13



FCB832 In-Line Bi-directional Flow Control

Part No.	Tube Size (mm)	Hex 1 mm	H Closed	H Open	K	L	L1	N1	N2	T
FCB832-4M	4	5	29.5	33.5	12.0	39.0	15.0	8.0	11.0	2.2
FCB832-6M	6	8	39.5	44.5	17.0	54.0	23.0	11.0	17.0	3.2
FCB832-8M	8	11	44.0	50.0	18.5	60.5	26.0	12.5	20.0	3.2



FCPM832 In-Line Panel Mountable Flow Control

Part No.	Tube Size (mm)	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	K	L	H1	H2	T
FCPM832-4M	4	14		21.5	25.5	6.0	39.0	6.5	11.0	10.5
FCPM832-6M	6	19		27.5	32.5	7.0	54.0	7.5	13.5	16.5
FCPM832-8M	8	24	11	28.5	34.5	7.0	60.5	9.0	13.5	18.5
FCPM832-10M	10	30	14	29.5	38.5	7.0	76.0	11.5	13.5	24.5
FCPM832-12M	12	32	14	32.0	42.0	8.0	86.0	12.5	15.5	27.5

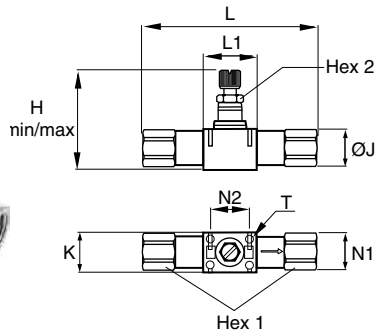

FC836 Threaded In-Line Flow Control

Part No.	NPT	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	K	L	L1	N1	N2	T
FC836-2	1/8	13	8.00	1.56	1.75	0.67	2.70	0.91	0.43	0.67	0.12
FC836-4	1/4	16	11.00	1.73	1.97	0.73	3.27	1.02	0.49	0.79	0.12
FC836-6	3/8	22	14.00	2.05	2.40	0.94	3.82	1.30	0.63	1.02	0.16
FC836-8	1/2	24	14.00	2.26	2.66	1.10	4.76	1.38	0.79	1.08	0.16

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

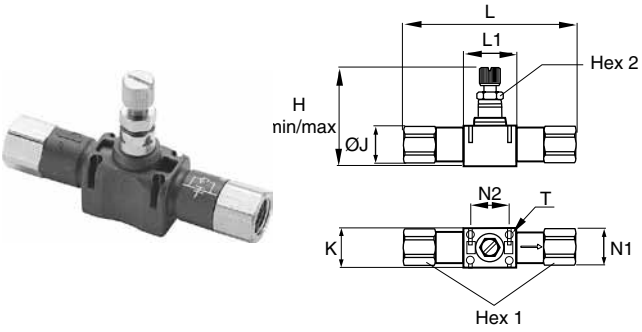

FC836 Threaded In-Line Flow Control - BSPP

Part No.	BSPP	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	K	L	N1	N2	T
FC836-2G	1/8	13	8	39.5	44.5	17.0	68.5	11.0	17.0	3.2
FC836-4G	1/4	16	11	44.0	50.0	18.5	83.0	12.5	20.0	3.2
FC836-6G	3/8	19	14	52.0	61.0	24.0	97.0	16.0	26.0	4.2
FC836-8G	1/2	24	14	57.5	67.5	28.0	121.0	20.0	27.5	4.2

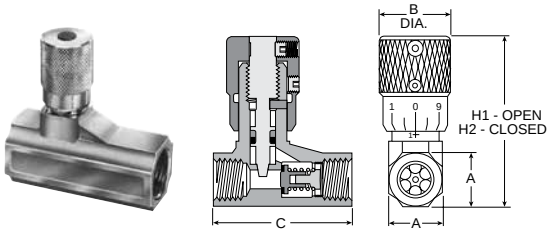

337 Micrometer Flow Control Valves

Part No.	Port Size	A	B	C	H1	H2
00337 1000	1/8"	9/16"	0.75	1.47	2.03	1.81
00337 1001	1/4"	11/16"	0.75	1.47	2.28	2.03
00337 1002	3/8"	7/8"	0.88	2.31	2.84	2.53
00337 1003	1/2"	1-3/16"	1.06	3.25	3.62	3.22
00337 1004	3/4"	1-3/8"	1.06	3.25	3.72	3.31

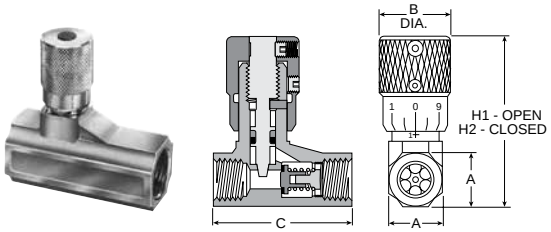

337 Micrometer Flow Control Valves - BSPP

Part No.	Port Size	A	B	C	H1	H2
00337G1000	1/8"	9/16"	0.75	1.47	2.03	1.81
00337G1001	1/4"	11/16"	0.75	1.47	2.28	2.03
00337G1002	3/8"	7/8"	0.88	2.31	2.84	2.53
00337G1003	1/2"	1-3/16"	1.06	3.25	3.62	3.22
00337G1004	3/4"	1-3/8"	1.06	3.25	3.72	3.31

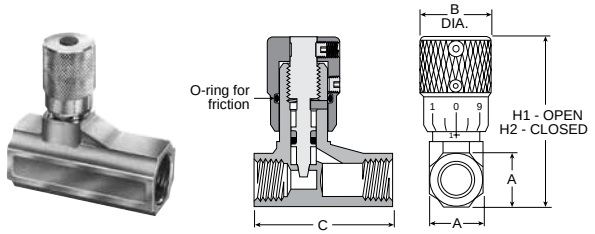

338 Bi-directional Flow Control Valves

Part No.	Port Size	A	B	C	H1	H2
00338 1100	1/8"	9/16"	0.75	1.47	2.03	1.81
00338 1101	1/4"	11/16"	0.75	1.47	2.28	2.03
00338 1102	3/8"	7/8"	0.88	2.31	2.84	2.53
00338 1103	1/2"	1-3/16"	1.06	3.25	3.62	3.22
00338 1104	3/4"	1-3/8"	1.06	3.25	3.72	3.31

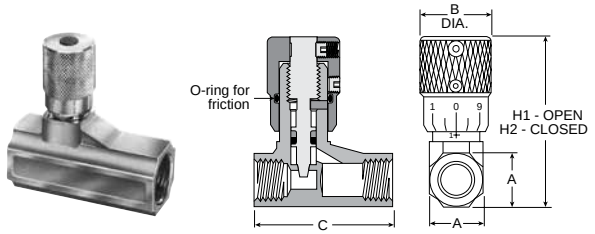

338 Bi-directional Flow Control Valves - BSPP

Part No.	Port Size	A	B	C	H1	H2
00338G1100	1/8"	9/16"	0.75	1.47	2.03	1.81
00338G1101	1/4"	11/16"	0.75	1.47	2.28	2.03
00338G1102	3/8"	7/8"	0.88	2.31	2.84	2.53
00338G1103	1/2"	1-3/16"	1.06	3.25	3.62	3.22
00338G1104	3/4"	1-3/8"	1.06	3.25	3.72	3.31

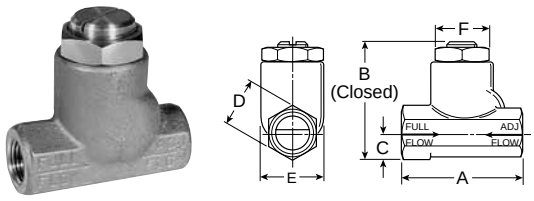

3250 Flow Control Valves

Part No.	Port Size	A	B	C	D	E	F
03250 0119	1/8"	1.75	1.56	0.37	0.62	0.81	0.68
03250 0219	1/4"	2.33	1.97	0.44	0.75	1.09	0.94
03250 0319	3/8"	2.66	2.44	0.56	1.00	1.38	1.19
03250 0419	1/2"	3.11	3.06	0.75	1.25	1.63	1.38
03250 0519	3/4"	3.56	3.69	0.88	1.50	2.00	1.75

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics



3250 Flow Control Valves - BSPP

Part No.	Port Size	A	B	C	D	E	F
3250G0119	1/8"	1.75	1.56	0.37	0.62	0.81	0.68
3250G0219	1/4"	2.33	1.97	0.44	0.75	1.09	0.94
3250G0319	3/8"	2.66	2.44	0.56	1.00	1.38	1.19
3250G0419	1/2"	3.11	3.06	0.75	1.25	1.63	1.38
3250G0519	3/4"	3.56	3.69	0.88	1.50	2.00	1.75



3250 Flow Control Valves

Part No.	Port Size	A	B	C	D	E	F	G	H
3250G1000	1"	5.00	6.50	3.00	3.25	2.25	.39	1.31	2.13
3250G1250	1-1/4"	5.00	6.50	3.00	3.25	2.25	.39	1.31	2.13
3250G1500	1-1/2"	5.88	8.00	3.75	3.50	2.50	.39	1.50	2.38



3250 Flow Control Valves - BSPP

Part No.	Port Size	A	B	C	D	E	F	G	H
03250 1000	1"	5.00	6.50	3.00	3.25	2.25	.39	1.31	2.13
03250 1250	1-1/4"	5.00	6.50	3.00	3.25	2.25	.39	1.31	2.13
03250 1500	1-1/2"	5.88	8.00	3.75	3.50	2.50	.39	1.50	2.38

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Materials of Construction	
Body:	Treated Brass
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Tailpiece:	Nickel-plated brass

Nomenclature	
Example: FCMS731-5/32-2	**Attribute:**
FC	Flow control
7	Right angle
0	Brass body
1	Tube x pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread

Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4, 3/8
Tube O.D. (mm)	4, 6, 8, 10, 12, 14

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

Metal flow control regulators are suited for use in severe conditions (temperatures, sparks, abrasion, etc). The screw and locking nut have been designed for easy manipulation, by hand. Adjustment can be made with a screwdriver and locking by use of a wrench.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Shown with Threaded Inlet

Shown with Prestolok Inlet Fitting



Model Number	Thread (NPT) Male	Thread (NPT) Female	A mm	B mm	C mm	Weight kg.	Cv Adjusted Flow	Cv Free Flow
03251 0125	1/8	1/8	44	30	17	0.9	0.26	0.20
03251 0250	1/4	1/4	51	36	23	2.0	0.75	0.68
03251 0375	3/8	3/8	58	43	27	3.2	0.84	0.72
03251 0500	1/2	1/2	68	53	32	5.0	1.64	1.41
With Prestolok Fittings								
03251 1215	1/8	5/32	44	30	17	0.9	0.19	0.16
03251 1225	1/8	1/4	44	30	17	0.9	0.28	0.22
03251 2525	1/4	1/4	51	36	23	2.0	0.51	0.44
03251 2538	1/4	3/8	51	36	23	2.0	0.62	0.53
03251 3838	3/8	3/8	58	43	27	3.2	0.78	0.65

CAUTION: If it is possible that the ambient temperature may fall below freezing, the medium must be moisture-free to prevent internal damage or unpredictable behavior.

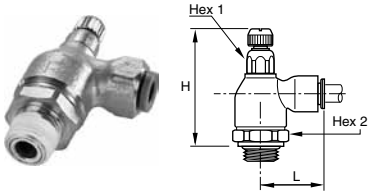

FC705 Push-to-Connect Metal Flow Control

Part No.	Tube Size (In)	NPT	Hex 1 mm	Hex 2 mm	H Closed	H Open	L
FC705-5/32-2	5/32	1/8	19	10	1.79	2.01	0.85
FC705-4-2	1/4	1/8	19	10	1.79	2.01	0.97
FC705-4-4	1/4	1/4	19	10	1.79	2.01	0.97
FC705-6-4	3/8	1/4	19	14	1.91	2.11	1.14
FC705-6-6	3/8	3/8	25	17	2.15	2.40	1.40

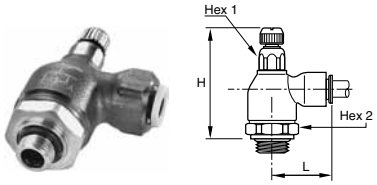

FC701 Push-to-Connect Metal Flow Control - BSPP

Part No.	Tube Size (mm)	BSPP	Hex 1	Hex 2	H Closed	H Open	L
FC701-4M-2G	4	1/8	10	19	47.0	53.0	21.0
FC701-6M-2G	6	1/8	10	19	47.0	53.0	24.5
FC701-6M-4G	6	1/4	10	19	47.5	53.0	24.5
FC701-8M-2G	8	1/8	14	19	50.0	55.0	29.0
FC701-8M-4G	8	1/4	14	19	50.0	56.0	29.0
FC701-8M-6G	8	3/8	17	25	56.0	62.0	30.5
FC701-10M-4G	10	1/4	14	19	50.0	56.0	35.0
FC701-10M-6G	10	3/8	17	25	56.0	62.0	35.0
FC701-12M-6G	12	3/8	17	25	56.0	62.0	38.0
FC701-12M-8G	12	1/2	17	25	55.0	62.0	38.0
FC701-14M-8G	14	1/2	17	25	55.0	62.0	41.0

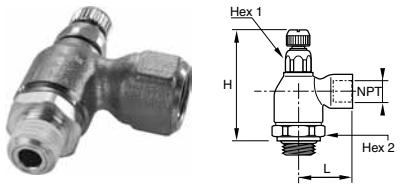

FC708 Threaded Port Meter Out Flow Control

Part No.	NPT	Hex 1 mm	Hex 2 mm	H Closed	H Open	L	L1	L2
FC708-2	1/8	19	10	1.79	2.01	0.89	0.87	1.14
FC708-4	1/4	19	14	1.91	2.11	1.28	0.87	1.28
FC708-6	3/8	25	17	2.15	2.40	1.36	0.91	1.44
FC708-8	1/2	25	17	2.15	2.40	1.50	0.91	1.50

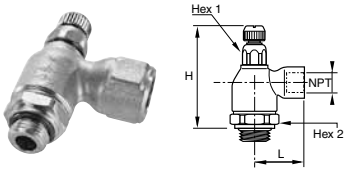

FC702 Threaded Port Metal Flow Control - BSPP

Part No.	BSPP	Hex 1 mm	Hex 2 mm	H Closed	H Open	L
FC702-2G	1/8	10	19	47.0	52.5	22.5
FC702-4G	1/4	14	19	50.5	55.5	32.0
FC702-6G	3/8	17	25	56.0	62.0	34.5
FC702-8G	1/2	17	25	55.0	62.0	37.5

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Materials of Construction	
Body:	• 32PLCK: Nylon/nickel plated brass • 68PLCK: Nylon body with nickel-plated brass base • VC: Acetal
Gripping Ring:	Stainless Steel
O-Ring:	• Nitrile (32PLCK & 68PLCK) • EPDM (VC)

Nomenclature	
Example: W68PLCK-4-2	**Attribute:**
W	White thread sealant
68	Tube x Pipe
PL	Prestolok
CK	Check Valve
4	1/4 Tube O.D.
2	1/8 Pipe thread

Nomenclature	
Example: A4VC4-MG	**Attribute:**
A	Acetal
4	1/4 Tube O.D.
VC	Valve, Check
4	1/4 Tube O.D.
MG	Metal gripping ring

Applicable Tube	
Tube O.D.	• PLCK: 5/32, 1/4, 5/16, 3/8 • VC: 1/4, 5/16, 3/8
Tube O.D. (mm)	PLCK: 4, 6, 8, 10, 12

Specifications	
Pressure Range:	15 TO 145 PSI
Temperature Ranges:	34°F to 150°F
Cracking Pressure:	• PLCK: 7 PSI • VC: 1/3 PSI
Working Fluid:	Compressed air

These in-line check valves allows air to pass in one direction while blocking flow in the other direction. Their extreme compactness and light weight make them suitable as a safety item in compressed air circuits. The body of the fitting contains an arrow to indicate the direction of flow.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics



32PLCK In-Line Check Valve

Part No.	Tube Size (In)	L
32PLCK-5/32	5/32	1.52
32PLCK-4	1/4	1.61
32PLCK-5	5/16	2.03
32PLCK-6	3/8	2.50



32PLCK In-Line Check Valve

Part No.	Tube Size (mm)	L
32PLCK-4M	4	38.5
32PLCK-6M	6	41.0
32PLCK-8M	8	51.5
32PLCK-10M	10	63.5
32PLCK-12M	12	66.5



W68PLCK Male Check Valve

Part No.	Tube Size (in)	NPT / UNF	Hex (mm)	H
68PLCK-5/32-0	5/32	10-32	9	1.26
W68PLCK-5/32-2	5/32	1/8	16	1.12
W68PLCK-4-2	1/4	1/8	19	1.42
W68PLCK-4-4	1/4	1/4	19	1.42
W68PLCK-6-4	3/8	1/4	23	1.65
W68PLCK-6-6	3/8	3/8	23	1.65



W68PLCKI Male Check Valve Meter In

Part No.	Tube Size (In)	NPT / UNF	Hex (mm)	H
68PLCKI-5/32-0	5/32	10-32	9	1.26
W68PLCKI-5/32-2	5/32	1/8	16	1.12
W68PLCKI-4-2	1/4	1/8	19	1.42
W68PLCKI-4-4	1/4	1/4	19	1.42
W68PLCKI-6-4	3/8	1/4	23	1.65
W68PLCKI-6-6	3/8	3/8	23	1.65



68PLCK Male Check Valve Meter Out - BSPP

Part No.	Tube Size (mm)	BSPP	Hex 1 (mm)	H
68PLCK-4M-M5	4	M5X0.8	9	32.0
68PLCK-4M-2G	4	1/8	16	28.5
68PLCK-6M-2G	6	1/8	16	30.5
68PLCK-6M-4G	6	1/4	16	30.5
68PLCK-8M-2G	8	1/8	19	36.0
68PLCK-8M-4G	8	1/4	19	36.0



68PLCKI Male Check Valve Meter In - BSPP

Part No.	Tube Size (mm)	BSPP	Hex 1 (mm)	H
68PLCKI-4M-M5	4	M5X0.8	9	32.0
68PLCKI-6M-2G	6	1/8	16	30.5
68PLCKI-8M-2G	8	1/8	19	36.0
68PLCKI-8M-4G	8	1/4	19	36.0
68PLCKI-10M-6G	10	3/8	23	42.0
68PLCKI-12M-6G	12	3/8	23	42.0
68PLCKI-12M-8G	12	1/2	23	44.0



VC – Check Valve

Part No.	Tube Size (In)	L	O.D.
A4VC4-MG	1/4	2.00	.66
A5VC5-MG	5/16	2.10	.70
A6VC6-MG	3/8	2.15	.80

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

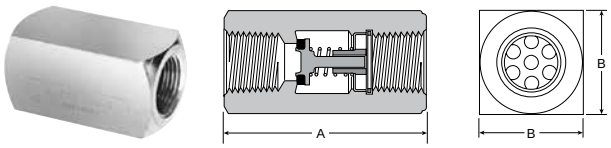

339 Check Valve

Part No.	Port Size	A	B
00339 3000	1/8"	1.22	0.56
00339 3001	1/4"	1.34	0.69
00339 3002	3/8"	2.00	0.88
00339 3003	1/2"	2.56	1.19
00339 3004	3/4"	2.66	1.38

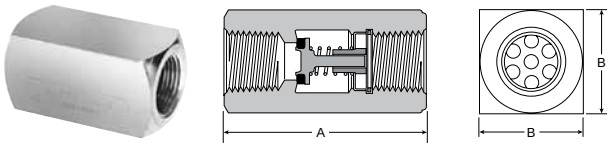

339 Check Valve - BSPP

Part No.	Port Size	A	B
00339G3000	1/8"	1.22	0.56
00339G3001	1/4"	1.34	0.69
00339G3002	3/8"	2.00	0.88
00339G3003	1/2"	2.56	1.19
00339G3004	3/4"	2.66	1.38

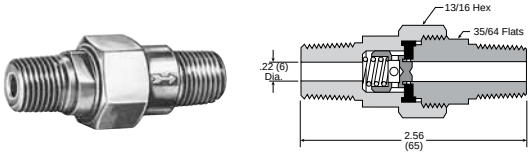

3047 Check Valve

Model Number	Pipe Thread
03047 0099	1/4"

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Notes

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Materials of Construction	
Body:	Treated Brass
Gripping Ring:	Stainless Steel
Seals, Diaphragm:	Nitrile

Nomenclature	
Example: FC601-4-2	**Attribute:**
FC	Flow control
6	Blocking
0	Brass body
1	Tube x pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread

Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4, 3/8
Tube O.D. (mm)	4, 6, 8, 10, 12, 14

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	-4° to 160°F
Number of Cycles	> 10 million at 68°F and 1 Hz
Leak Rate:	< 3.2 CCM
Working Fluid:	Compressed air

Blocking valves prevents damage to work and equipment in the event of a loss of pressure. Blocking valves which are mounted in pairs on a cylinder lock the piston by simultaneously cutting off the supply and exhaust. Functional locks are more precise and rapid when blocking valves are located on the cylinder: the volume of air in the pipework no longer needs to be taken into consideration.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics



FC601 Push-to-Connect Lockout Valves

Part No.	Tube Size (in)	NPT	Hex (mm)	H	H1	H2	L
FC601-4-2	1/4	1/8	21	2.03	1.24	0.79	1.10
FC601-4-4	1/4	1/4	21	2.03	1.24	0.79	1.10
FC601-6-6	3/8	3/8	24	2.19	1.14	1.04	1.38
FC601-8-8	1/2	1/2	24	2.19	1.14	1.04	1.69



FC602 Threaded Port Lockout Valves

Part No.	1 NPT	2 NPT	Hex (mm)	H	H1	H2	L
FC602-2	1/4	1/8	21	2.03	1.24	0.79	1.04
FC602-4	1/4	1/4	21	2.03	1.24	0.79	1.04
FC602-6	3/8	3/8	24	2.19	1.14	1.04	1.34
FC602-8	1/2	1/2	24	2.19	1.14	1.04	1.57



FC601 Push-to-Connect Lockout Valve - BSPP

Part No.	Tube Size (mm)	BSPP	Hex 1 (mm)	H	H1	H2	L
FC601-6M-2G	6	1/8	21	53	24.5	21.0	28.0
FC601-6M-4G	6	1/4	21	53	24.5	21.0	28.0
FC601-8M-4G	8	1/4	21	53	24.5	21.0	28.0
FC601-8M-6G	8	3/8	24	56	25.0	23.0	34.5
FC601-10M-6G	10	3/8	24	56	25.0	23.0	35.0
FC601-12M-8G	12	1/2	24	56	25.0	23.0	37.5



FC608 Threaded Port Lockout Valve - BSPP

Part No.	BSPP 1	BSPP 2	Hex 1 (mm)	H	H1	H2	L
FC608-4G-2G	1/8	1/4	21	53	24.5	21.0	28.0
FC608-4G-4G	1/4	1/4	21	53	24.5	21.0	28.0
FC608-6G-6G	3/8	3/8	24	56	25.0	23.0	34.0
FC608-8G-8G	1/2	1/2	24	56	25.0	23.0	41.0

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Specifications: Models PSBJ, PSPJ	
Working Temperature:	5° to 140°F
Working Pressure:	45 to 115 PSI
Breaking Pressure:	8.5 PSI
Response Time:	3 Ms

Specifications: Model PSPE	
Working Pressure:	45 to 115 PSI
Breaking Pressure:	7 PSI
Current Rating:	5A / 250VAC - 5W / 48VDC

UL Listed Component	
Reset Pressure:	10 PSI

The sensor fitting detects the absence of pressure and translates it to a high pressure pneumatic output. When used to monitor the decaying or exhausting side of a pneumatic cylinder's piston, it emits a positive output. When the cylinder comes to the end of its stroke, wherever that may be, the signal emitted from the sensor can then be used to pilot the next step.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

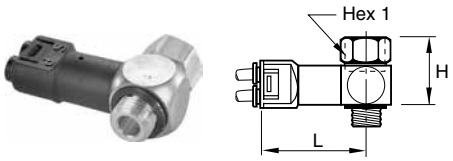

PSBJ731 Pneumatic Threshold Sensor - 5/32 Pilot

Part No.	NPT / UNF	Hex (mm)	H	L
PSBJ731-0	10-32	5/16	0.62	1.70
PSBJ731-2	1/8	9/16	0.90	1.74
PSBJ731-4	1/4	5/8	1.09	1.81
PSBJ731-6	3/8	7/8	1.13	1.91
PSBJ731-8	1/2	1	1.17	2.05

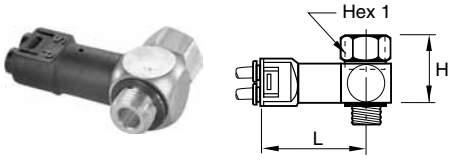

PSBJ731 Pneumatic Threshold Sensor - 4mm Pilot

Part No.	BSPP	Hex 1 (mm)	H	L
PSBJ731-M5	M5X0.8	8	16	43.5
PSBJ731-2G	1/8	14	23	44.5
PSBJ731-4G	1/4	17	28	46.5
PSBJ731-6G	3/8	22	29	49.0
PSBJ731-8G	1/2	27	30	52.5

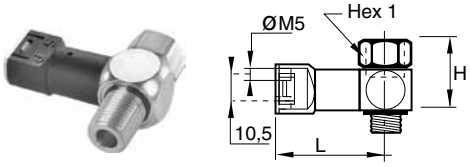

PSPJ731 Pneumatic Threshold Sensor - 10-32 Pilot

Part No.	NPT	Hex 1 (mm)	H	L
PSPJ731-2	1/8	9/16	0.90	1.58
PSPJ731-4	1/4	5/8	1.09	1.66
PSPJ731-6	3/8	7/8	1.13	1.76

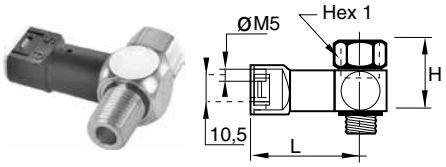

PSBJ708 Pneumatic Threshold Sensor - M5 Pilot

Part No.	BSPP	Hex 1 (mm)	H	L
PSBJ708-2G	1/8	14	23	40.5
PSBJ708-4G	1/4	17	28	42.5

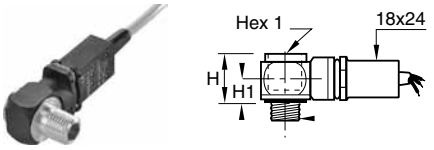

PSPE701 Pneumatic / Electric Threshold Sensor - BSPP

Part No.	BSPP	Hex 1 (mm)	H	H1	L
PSPE701-M5	M5X0.8	8	20	10	49
PSPE701-2G	1/8	6	20	10	52
PSPE701-4G	1/4	8	20	10	54
PSPE701-6G	3/8	10	22	12	57
PSPE701-8G	1/2	12	26	14	58

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Notes

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Accessories

Section G

www.parker.com/accessories

Tank Valves & Air Chucks.....G60
EM Series Exhaust Mufflers.....G61
Muffler / Flow Controls G61
Breather Vents.....G62
ES Series Silencer G62
ASN Air Line Silencer.....G63
P6M Air Line Silencer G64
Muffler-Reclassifier ECS G65
Automatic Drip Leg Drain & Relief Valve.....G66
Relief Valves - Diaphragm Type.....G67
Shuttle Valves & Quick Exhaust G68-G70
Pressure Switch G71
Drain Valves.....G72-G73

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Tank Valves

For tanks, steel barrels, compressors and other pneumatic containers where a dependable automatic air valve is needed. Equipped with standard valve core and sealing cap. Maximum operating pressure is 185 PSIG. Temperature range is -40°F to 220°F.

Model No. 09166 0060

Has a 1/8" pipe thread at bottom for minimum protrusion. N/P finish, dome shaped cap.
Packed 25 to a box.

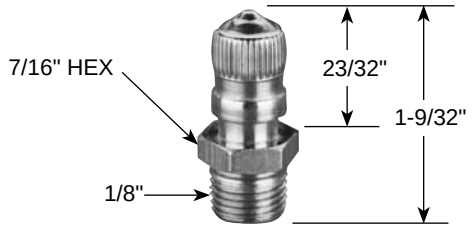

Model No. 00645 0060

A 1/8" pipe thread at bottom permits maximum protrusion. N/P finish, screwdriver type cap.
Packed 25 to a box.

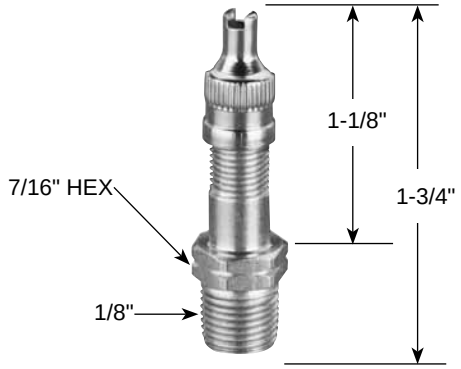

Model No. 01468 0006

Has a 1/8" pipe thread part way up the stem which allows for minimum protrusion. N/P finish, has screwdriver type cap.
Packed 25 to a box.

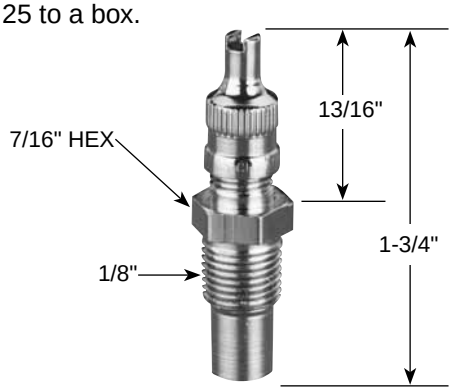

Air Chucks

For regular airlines.

Model No. 05499 0000

Ball-foot air chuck, 1/4" female port.
Packed 10 to a box.

Model No. 06739 0000

Ball-foot air chuck with clip. Fits standard valve mouth. Saves holding on by hand. Has 1/4" port for connecting to hose.
Packed 10 to a box.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

EM Series – Sintered Bronze Muffler / Filters

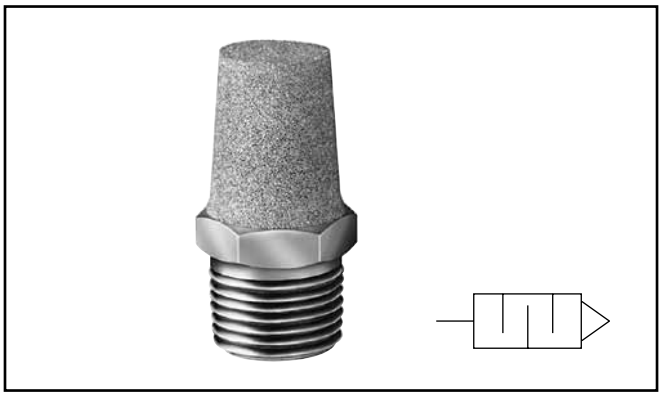

General Description

Muffler / filters effectively reduce air exhaust noises to an industry accepted level with minimum flow restriction. They protect valves, impact wrenches, screw drivers and other air tools by preventing dirt and other foreign matter from entering the system. Non-corrosive. Can be cleaned with many common solvents.

Specifications

Maximum Operating Pressure.....250 PSIG (Air)

Operating Temperature ..... 0° to 300°F*

* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Model Number	Pipe Thread	Overall Length	Hex Size
EMM5	M5	.75	5/16"
EM12	1/8"	1.00	7/16"
EM25	1/4"	1.32	9/16"
EM37	3/8"	1.54	11/16"
EM50	1/2"	1.85	7/8"
EM75	3/4"	2.29	1-1/6"
EM100	1"	2.91	1-5/16"
EM125	1-1/4"	3.25	1-11/16"
EM150	1-1/2"	3.69	2"

Muffler / Flow Controls

General Description

Muffler / flow controls provide an acceptable exhaust noise level and effectively meter exhaust. Installed in valve exhaust ports, they control cylinder piston speeds throughout a wide range. The adjusting screw cannot be accidently blown out, can be locked to maintain setting. Brass and bronze construction. Clean with commonly used solvents.

Specifications

Maximum Operating Pressure.....250 PSIG (Air)

Operating Temperature ..... 0° to 300°F*

* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Model Number	Pipe Thread	Overall Length	Hex Size
04502 0002	1/8"	1.15	9/16"
04504 0004	1/4"	1.42	1/2"
04506 0060	3/8"	1.49	11/16"
04508 0080	1/2"	1.77	7/8"
04512 0012	3/4"	1.98	1-1/16"
04516 0016	1"	2.15	1-5/16"

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Breather Vents

NOTE: Breather vents should not be used as exhaust mufflers.

General Description

These low silhouette versions of the muffler / filter are useful where space is a problem and / or to prevent contamination. Use for vacuum relief or pressure equalization in gear boxes, oil tanks, reservoirs, etc. Non-corrosive.

Specifications

Maximum Operating Pressure.....150 PSIG (Air)

Operating Temperature ..... 0° to 300°F*

* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Model Number	Pipe Thread	Overall Length	Hex Size
04702 0002	1/8"	0.44	7/16"
04704 0004	1/4"	0.63	9/16"
04706 0006	3/8"	0.75	11/16"
04708 0008	1/2"	0.88	7/8"
04712 0012	3/4"	1.00	1-1/6"
04716 0016	1"	1.31	1-5/16"
04720 0020	1-1/4"	1.41	1-11/16"
04724 0024	1-1/2"	1.50	2"

ES Series – Silencer

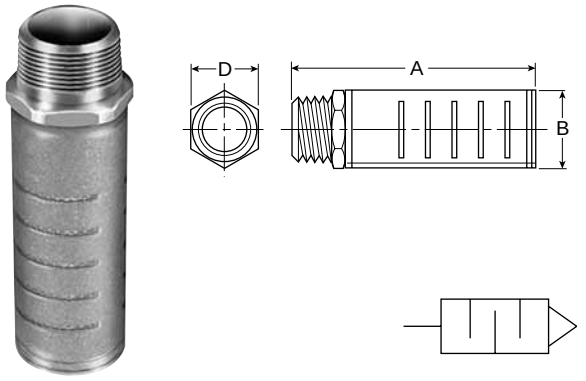

General Description

These low silhouette versions of the muffler / filter are useful where space is a problem and / or to prevent contamination. Use for vacuum relief or pressure equalization in gear boxes, oil tanks, reservoirs, etc. Non-corrosive.

The silencer is designed to give superior performance in noise control with a minimum effect on air efficiency. “Trimline” design allows location in the tightest places without extra plumbing and fittings. Fits directly into the exhaust port of more than 90% of present commercial valves. Slotted body permits rapid discharge of air without undesirable back pressure. Unique nylon screen element resists dirt buildup or clogging.

Specifications

Maximum Operating Pressure.....250 PSIG (Air)

Operating Temperature ..... 0° to 300°F*

* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Model Numbers		Pipe Thread	Flow SCFM @ 100 PSIG Inlet	Dimensions		
NPTF	BSPT (R)			A	B	D
ES12MC	**ESB12MC**	1/8"	115	1.85	0.81	0.63
ES25MC	**ESB25MC**	1/4"	129	1.85	0.81	0.63
ES37MC	**ESB37MC**	3/8"	219	3.31	1.26	1.00
ES50MC	**ESB50MC**	1/2"	549	3.31	1.26	1.00
ES75MC	**ESB75MC**	3/4"	893	4.56	2.01	1.62
ES100MC	**ESB100MC**	1"	1,013	4.56	2.01	1.62
ES125MC	**ESB125MC**	1-1/4"	1,486	5.69	2.88	—
ES150MC	**ESB150MC**	1-1/2"	1,580	5.69	2.88	—

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

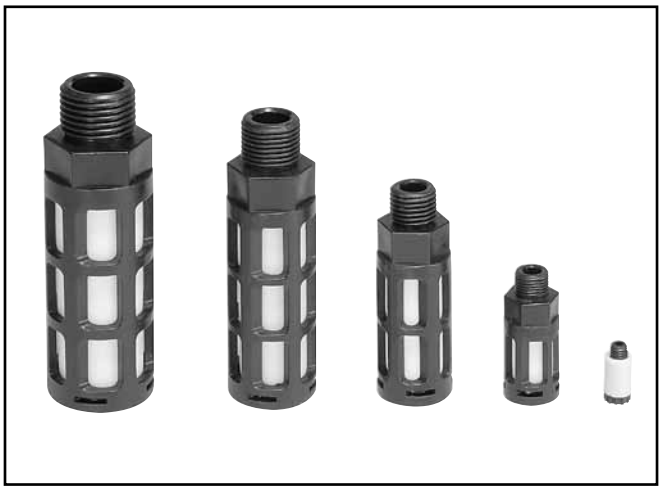

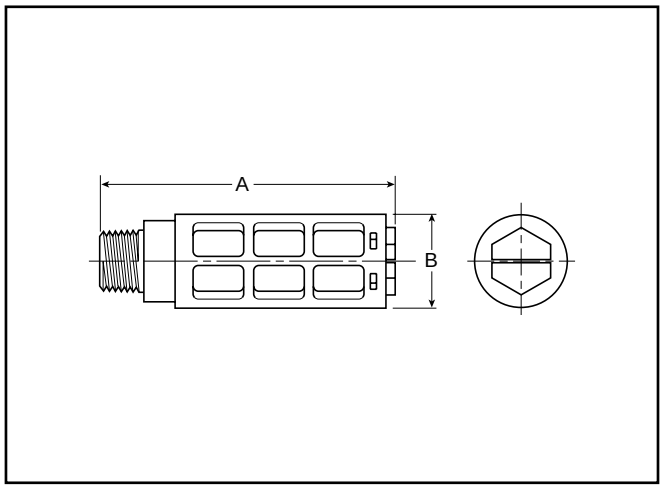

Features

- Compact
- Lightweight
- Easy to Install
- Excellent Noise Reduction
- Protects Components from Contamination
- NPT and BSPT Threads Available

Part Number		Thread Size	A (mm)	B (mm)	Maximum Flow (SCFM) 100 PSIG Inlet	Sound Pressure Level (dBA)	
NPT	BSPT					20 PSIG Inlet	100 PSIG Inlet
AS-5		M5	0.43 (11)	0.32 (8)	15	69	79
ASN-6	**AS-6**	1/8"	1.57 (40)	0.63 (16)	51	69	81
ASN-8	**AS-8**	1/4"	2.56 (65)	0.83 (21)	124	67	84
ASN-10	**AS-10**	3/8"	3.35 (85)	0.98 (25)	247	83	98
ASN-15	**AS-15**	1/2"	3.74 (95)	1.18 (30)	370	69	96

Application

The plastic silencer is designed to give excellent noise reduction with a minimum effect on air efficiency. The "Trimline" design allows for locating the silencer in the tightest places without extra plumbing or fittings. Fits directly into the exhaust port of most commercial valves. Open surface area of element allows for rapid discharge of air without undesirable back pressure.

Specifications

Pressure Rating.....0 to 150 PSIG (0 to 10 bar, 0 to 1034 kPa)

Temperature Rating .....14°F to 140°F (-10°C to 60°C)

Body .....Acetal (Plastic)

Element ..... Polyethylene

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

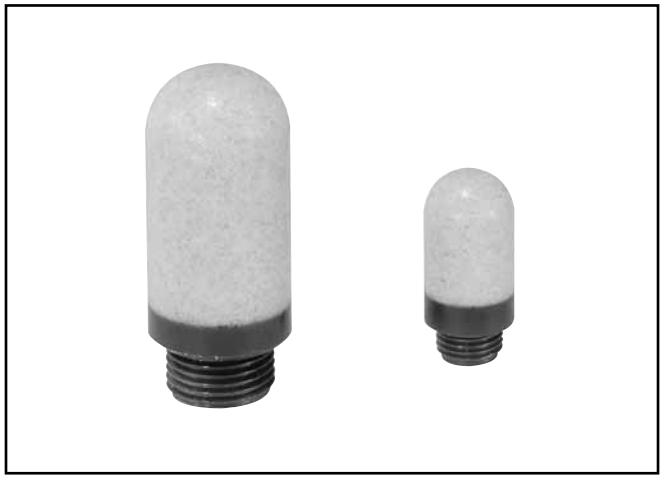

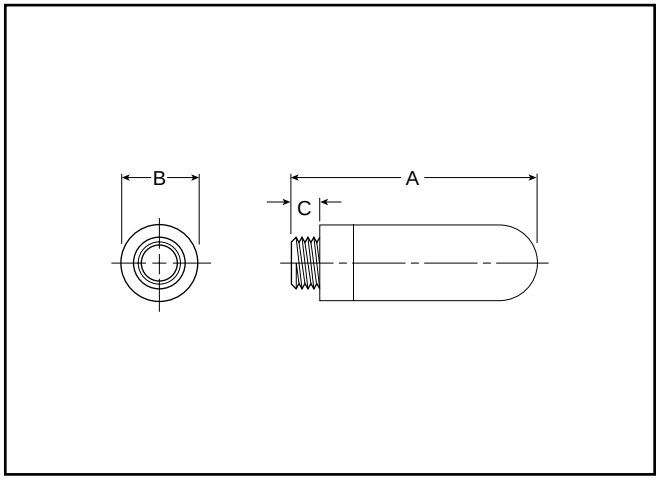

Features

- All Plastic Ultra Light Weight Versions
- High Noise Level Reduction
- Low Back Pressure Generation

Application

The plastic silencer is designed to give excellent noise reduction with a minimum effect on air efficiency. The "Trimline" design allows for locating the silencer in the tightest places without extra plumbing or fittings. Fits directly into the exhaust port of most commercial valves. Open surface area of element allows for rapid discharge of air without undesirable back pressure.

Part Number	Port Thread	A	Diameter B	C	Weight (grams)
P6M-PAC5	M5	0.91 (23)	0.26 (6,5)	0.16 (4)	0.01
P6M-PAB1	G1/8	1.14 (29)	0.55 (14)	0.24 (6)	0.02
P6M-PAB2	G1/4	1.34 (34)	0.67 (17)	0.24 (6)	0.04
P6M-PAB3	G3/8	2.36 (60)	0.98 (25)	0.35 (9)	0.06
P6M-PAB4	G1/2	2.52 (64)	0.98 (25)	0.43 (11)	0.10
P6M-PAB6	G3/4	5.51 (140)	1.50 (38)	0.55 (14)	0.50
P6M-PAB8	G1	6.30 (160)	1.89 (48)	0.79 (20)	0.62

Specifications

Pressure Rating..... 0 to 246 PSIG
(0 to 17 bar, 0 to 1700 kPa)

Temperature Rating

Plastic .....14°F to 176 °F (-10°C to 80°C)
Metal.....14°F to 165 °F (-10°C to 74°C)

Efficiency 92%

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

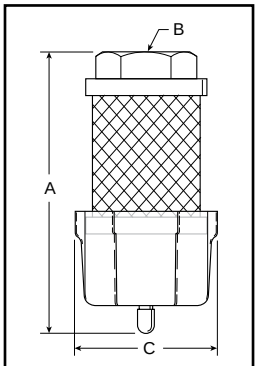

Dimensions:

Model	A	B	C
ECS3	5.30 (135 mm)	1/2" NPT	2.57 (65 mm)
ECS5	7.30 (185mm)	1" NPT	2.57 (65mm)

Performance Characteristics

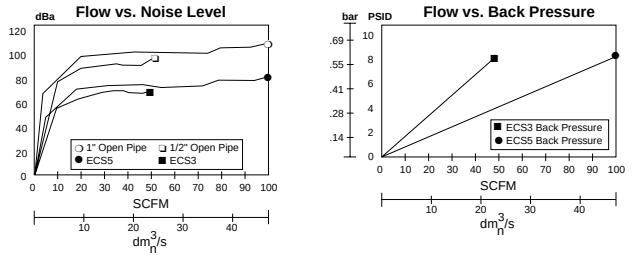

Features

The ECS (Muffler-Reclassifier) eliminates unwanted oil mist and reduces exhaust noise from pneumatic valves, cylinders and air motors.

- 99.97% Oil Removal Efficiencies
- 25 dBA Noise Attenuation
- 1/2" NPT and 1" NPT
- Disposable Units
- Continuous or Plugged Drain Option
- Metal Retained Construction
- Fast Exhaust Time

Improve Overall Plant Environment

Exhaust oil mist and noise pollution have a direct impact on worker productivity.

Oil aerosol mist from lubricators and compressors is pervasive and enters the industrial plant environment through the exhaust ports of valves, cylinders and air motors. This rapidly expanding exhaust also produces sudden and excessive noise.

The ECS (Muffler-Reclassifier) is 99.97% efficient at removing the oil aerosols. The ECS also acts as a silencer to lower the dBA levels below O.S.H.A. requirements.

The result is a cleaner, quieter environment which equates to greater work productivity and safety.

Operation

Compressor oils and lubricating oils are exhausted from valves, cylinders and air motors into the ECS. Oil aerosols are “coalesced” into larger droplets and gravity pulls them into the attached drain sump. The sump can then be drained manually or by using a 1/4" ID plastic tube drain. The air flowing into the ECS is also muffled or silenced as it enters the inside of the ECS and passes through the filter media into the atmosphere.

Proven Technology

The ECS units are constructed from the same materials that go into our oil removal coalescing filter elements.

The seamless design insures media uniformity and strength. This proven technology provides high coalescing efficiency with low pressure drop.

The filter media is supported by cylindrical perforated steel retainers both inside and out. These retainers, fully plated for excellent corrosion resistance, give the ECS units high rupture strength in either flow direction. These filters can also be used as high efficiency inlet or bypass filters for vacuum pumps, or breather elements to protect the air above critical process liquids.

ECS3 / ECS5

The ECS solves two problems inherent in compressed air exhaust from valves, cylinders and air motors - oil mist removal and noise abatement.

The ECS will improve your industrial plant environment, thereby improving worker productivity.

Specifications

Maximum Operating Temperature .....125°F (52°C)

Maximum Line Pressure.....100 PSIG (6.8 bar)

Ordering Information

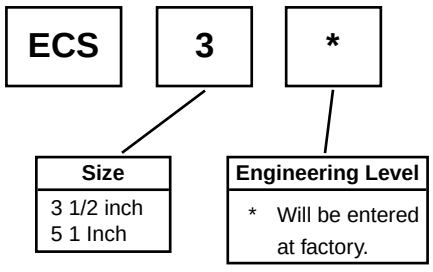

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Automatic Drip Leg Drain

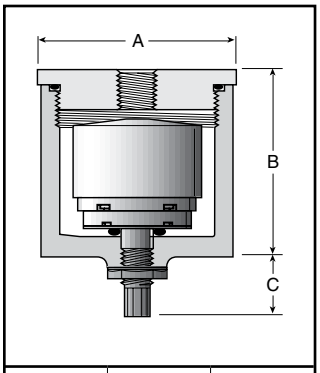

A	B	C
2.50	2.37	0.87
64 mm	60 mm	22 mm

Features

- Auto Drain Ported 1/8" to Pipe Away Liquid.
- Drain has Manual Override
- Easily Serviced without Tool
- 20-250 PSIG Range
- Compact Size

Specifications

Housing & Cap.....Aluminum

Port Threads..... 1/4" - 1/2" Top
1/8" Drain

Pressure and Temperature Ratings:
Metal Bowl..... 20 to 250 PSIG (0 to 17.2 bar)
32°F to 175°F (0°C to 80°C)

Seals.....Buna N

Ordering Information

Consists of Drip Leg Drain Housing WITH Auto Drain.

Model No.	Size
06D1NA	1/4"
06D3NA	1/2"

Relief Valve

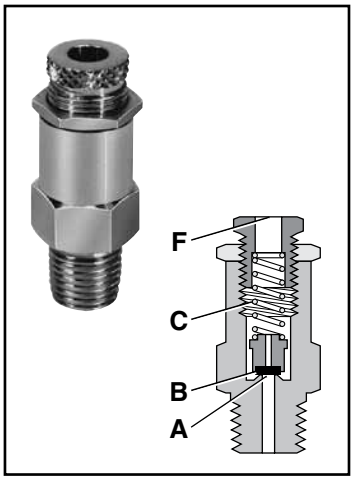

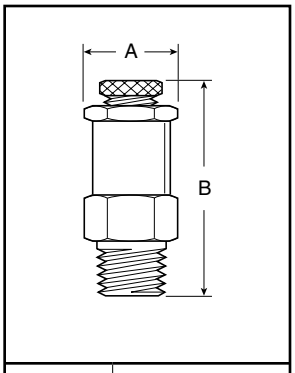

A	B
0.75 Hex	1.88 - 2.25
19 mm	47.8 - 57.2 mm

Features

- Large Relief Capacity (70.39 SCFM @ 150 PSI when fully opened) in a Compact Size
- Lightweight Aluminum Construction with Resilient Seat

Application

The RV01A1N Pop Off Relief Valve is designed to protect against excessive pressure buildup in a pneumatic circuit or system.

Operation*

With the relief valve mounted in a reservoir or system, the force of system pressure at **(A)** is offset by the force of spring **(C)** acting on poppet seat **(B)**. At pressures lower than the setting, the poppet seat **(B)** is held against the body at **(A)** effecting a seal. As pressure approaches set point, the poppet begins to vent until set point is reached, at which time the poppet seat **(B)** lifts off the body at **(A)** allowing the excess pressure to vent to atmosphere at **(F)**. When the excess pressure has been vented, the spring **(C)** acts on the poppet seat **(B)** forcing it to seat on the body at **(A)**, sealing off the flow of air.

Specification

Body & Adjusting Screw.....Aluminum

Locking Nut.....Steel

Seat.....Nitrile

Spring.....Steel

Poppet..... Plastic

Operating Temperature†..... 0°F to 200°F (-17°C to 93°C)

Port Threads..... 1/4 Inch Male

Relief Range..... 10 to 200 PSIG (.7 to 14 bar)
with standard spring.

* Ref: 1RV100B Installation & Service Instructions

† Only if using dry air for temperatures below 32°F (0°C)

Ordering Information

Seals

RV01A1N	**XXX**	
	10 -200 PSI	**Blank** **BUNA** V Flurocarbon

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

130 Relief Valve

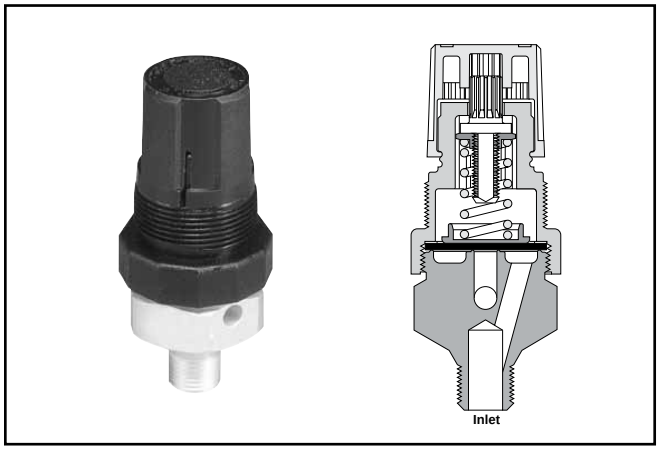

134 Relief Valve

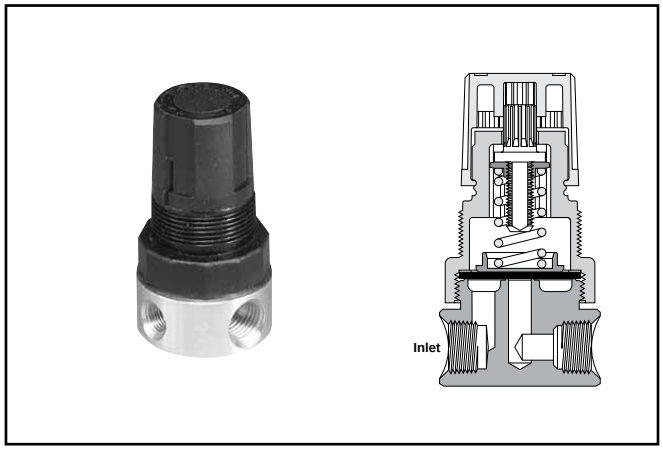

Features

- Compact, Sensitive Diaphragm-type Relief Valve
- Push-pull, Locking Knob
- Knob and Top Work the Same as a Miniature Regulator
- 130 has Lightweight Aluminum Construction
- 134 has a brass body, captured exhaust and is an Inline Type with 3 Inlet Ports and 1 Outlet Port

Applications

- Designed to Protect Against Excessive Pressure Buildup in a Pneumatic Circuit or System
- For Use where Gradual Proportional Relief is Required

Operation

- Turn relief valve knob clockwise for maximum pressure.
- Set pressure going into relief valve at desired pressure.
- Turn relief valve knob counter-clockwise until exhaust starts to bleed.
- Turn relief valve knob clockwise until exhaust stops bleeding. Push to lock knob.

Ordering Information

Relief Valve	Spring Range			
	0-15 PSIG	0-25 PSIG	0-50 PSIG	0-100 PSIG
130	130-02AA 130-02AAP*	130-02A 130-02AP*	130-02B 130-02BP*	130-02C 130-02CP*
134	134-02AA 134-02AAP*	134-02A 134-02AP*	134-02B 134-02BP*	134-02C 134-02CP*

* Panel mount nut included.

Dimensions

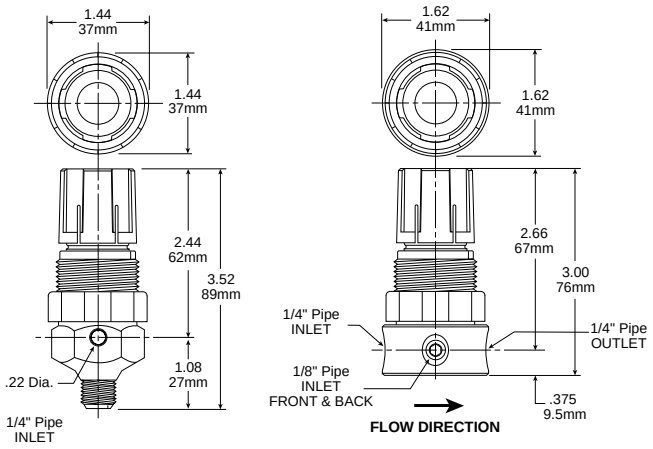

130 **134**

Relief Valve Kits

Bonnet Assembly Kit PCKR364Y
Panel Mount Nut PR05X51

Specifications

Relief Range ..... 0 to 100 PSIG (0 to 6.9 bar)
Maximum Inlet Pressure ..... 300 PSIG (20.7 bar)
Operating Temperature ..... 40°F to 120°F (4°C to 49°C)
Port Threads:
130 ..... 1/4" Pipe Male Only
134 ..... Inlet Port – Two 1/8" & One 1/4" Pipe
Outlet Port – 1/4" Pipe

Materials of Construction

Adjusting Knob ..... Polypropylene
Adjusting Screw ..... Zinc-plated Steel
Body ..... Aluminum (130); Brass (134)
Diaphragm / Disc ..... Buna-N
Nut ..... Chromated Steel
Spring Cage ..... Acetal
Spring ..... Zinc-plated Steel

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics



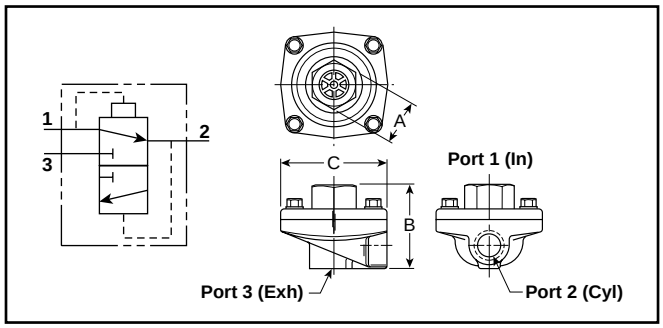

General Information

Quick exhaust valves provide rapid exhaust of control air when placed between control valve and actuator. They can also be used as shuttle valves. Diaphragm materials are available in urethane, Nitrile, Fluorocarbon, and PTFE to meet a wide variety of operating conditions.

Valve Specifications

Operating Pressure (Air)

Maximum:

150 PSIG

200 PSIG for Model No. 0R37TB (PTFE diaphragm)

Minimum:

3 PSIG

50 PSIG for Model No. 0R37TB (PTFE diaphragm)

Operating Temperature:

Urethane: 0°F to 180°F* (-18°C to 80°C)

Nitrile: 0°F to 180°F* (-18°C to 80°C)

Fluorocarbon: 0°F to 400°F* (-18°C to 205°C)

PTFE: 0°F to 500°F* (-18°C to 260°C)

* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Component Materials

Body Material..... Die cast aluminum

Static Seals.....Nitrile standard with urethane (Others see below)

Diaphragm ..... Standard – Urethane
Optional – Fluorocarbon, PTFE, or Nitrile (Depending on size)

Mounting Bracket Kit – No. 03640 8100

(Including body screws)

For “0R12” and “0R25” sizes with 7/8" “A” Dimension.



Model Selection, Performance Data and Dimensions

Port			Flow	Model Number		A	B	C	Service
1	2	3	(SCFM†)	NPTF	BSPP “G”				Kit No.
STANDARD URETHANE DIAPHRAGMS (Nitrile static seals)									
1/4"	1/4"	3/8"	150	**0R25NB**	0RB25NB	1" Hex	2.06	2.44	03340 0105
	3/8"	3/8"	240	**0R25PB**	—	1" Hex	2.06	2.44	03340 0105
3/8"	3/8"	3/8"	240	**0R37B**	0RB37B	1" Hex	2.06	2.44	03340 0105
1/2"	1/2"	1/2"	450	**0R50B**	0RB50B	1-1/2" Hex	2.88	3.38	03475 0109
3/4"	3/4"	3/4"	550	**0R75B**	0RB75B	1-1/2" Hex	2.88	3.38	03475 0109
NITRILE DIAPHRAGMS (Nitrile static seals)									
1/8"	1/8"	1/8"	70	**0R12B**	0RB12B	7/8" Sq.	1.75	1.88	03640 8000
	1/8"	1/4"	70	**0R12NB**	0RB12NB	7/8" Sq.	1.75	1.88	03640 8000
1/4"	1/4"	1/4"	90	**0R25B**	0RB25B	7/8" Sq.	1.75	1.88	03640 8000
	1/4"	3/8"	90	0R25NFB	0RB25NFB	7/8" Sq.	1.75	1.88	03340 8000
3/8"	3/8"	3/8"	240	0R37FB	0RB37FB	1" Hex	2.06	2.44	03340 8000
3/4"	3/4"	3/4"	550	0R75FB	0RB75FB	1-1/2" Hex	2.88	3.38	03475 9000
FLUOROCARBON DIAPHRAGMS for extended temperature operation (Fluorocarbon static seals)									
1/8"	1/8"	1/8"	70	0R12VB	0RB12VB	7/8" Sq.	1.75	1.88	03650 8000
	1/8"	1/4"	70	0R12NVB	0RB12NVB	7/8" Sq.	1.75	1.88	03650 8000
1/4"	1/4"	1/4"	90	0R25VB	0RB25VB	7/8" Sq.	1.75	1.88	03650 8000
3/8"	3/8"	3/8"	240	0R37VB	0RB37VB	1" Hex	2.06	2.44	03340 0319
1/2"	1/2"	1/2"	450	0R50VB	0RB50VB	1-1/2" Hex	2.88	3.38	03475 0120
3/4"	3/4"	3/4"	550	0R75VB	0RB75VB	1-1/2" Hex	2.88	3.38	03475 0120
PTFE DIAPHRAGMS for higher pressure and temperature (Fibre static seals)									
3/8"	3/8"	3/8"	240	0R37TB	0RB37TB	1" Hex	2.06	2.44	03340 0504

† At 100 PSIG inlet pressure with full pressure drop.

BOLD ITEMS ARE MOST POPULAR.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics



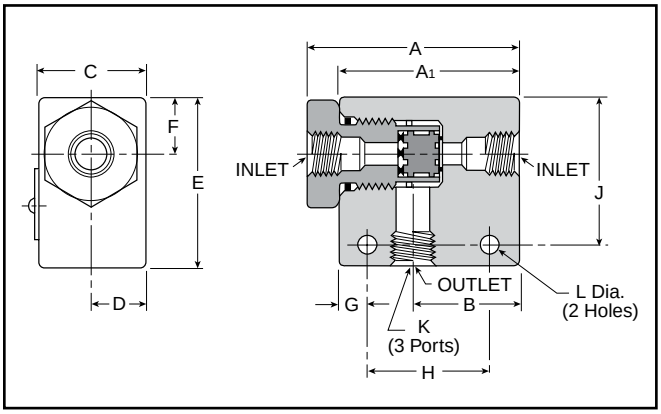

General Information

Shuttle valves determine a single pneumatic output from two separate inputs. If pressure is applied to both ports simultaneously, the valve will select the port with the higher pressure.

Valve Specifications

Maximum Operating Pressure.....200 PSIG Maximum
3 PSIG Minimum: Differential Pressure

Operating Temperature .....0° to 160°F*

* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Component Materials

Body Material.....Aluminum
Internal Components..... Aluminum
Seals.....Nitrile

Model Selection and Dimensions

Model Number	Port Size	Dimensions											
		A	A1	B	C	D	E	F	G	H	J	K	L
N164 1001	1/8"	N/A	1.62	0.81	0.62	0.31	1.00	0.281	0.312	1.00	0.75	1/8 - 27	0.219
N164 2003	1/4"	2.50	2.12	1.25	1.25	0.62	2.00	0.67	0.265	1.25	1.35	1/4 - 18	0.219
N164 3003	3/8"	2.50	2.12	1.25	1.25	0.62	2.00	0.67	0.265	1.25	1.35	3/8 - 16	0.219

Performance Data – Flow

Model Number	Port Size	Flow (Cv)
N164 1001	1/8"	0.32
N164 2003	1/4"	1.65
N164 3003	3/8"	2.02

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Typical "Quick Exhaust Valve" Applications



Rapid Retraction – Double Acting Cylinder

In this circuit, air is exhausted through a Quick Exhaust Valve that is **close coupled** to the cap end of the cylinder. Because the Quick Exhaust Valve has a greater exhaust capacity than the four-way Control Valve, increased cylinder speed can be accomplished with a smaller and less expensive control valve.



Dual Pressure Actuation of Double Acting Cylinder

This circuit utilizes a Quick Exhaust Valve and a three-way Control Valve to permit rapid extension of the cylinder at a high pressure. nder life.

NOTE: Line pressure must be 3 or 4 times greater than rod end pressure. Effective working pressure is the differential between the cap and rod end.



Bi-Directional Control of Two Double Acting Cylinders

This circuit provides maximum control with a minimum of valving. A large four-way Control Valve is not needed to permit the rapid retraction of Cylinder A, as the Quick Exhaust Valve performs this function. The extension of Cylinders A and B and retraction of Cylinder B are controlled by Speed Control Valves.

Typical "Shuttle Valve" Applications



"OR" Circuit

The most common application of the Shuttle Valve is the "OR" Circuit. Here a cylinder or other work device can be actuated by either control valve. The valves can be manually or electrically actuated and located in any position.



Memory Circuit

This circuit enables continuous operation once initiated. Pressure is delivered to the circuit when Valve A is actuated. This allows pressure to pass through the shuttle valve actuating Valve B. Pressure then flows through Valve B and also the other side of the shuttle valve which holds Valve B open for continuous operation. To unlock the circuit, Valve C must be opened to exhaust the circuit and allow Valve B to return to its normally closed position.



Interlock

This circuit prevents the occurrence of a specific operation while one or another operation takes place. When either Valve A or B is actuated to perform operation 1 or 2, Valve D is shifted to the closed position and prevents operation 3 from occurring.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Pressure Switch – PPS1

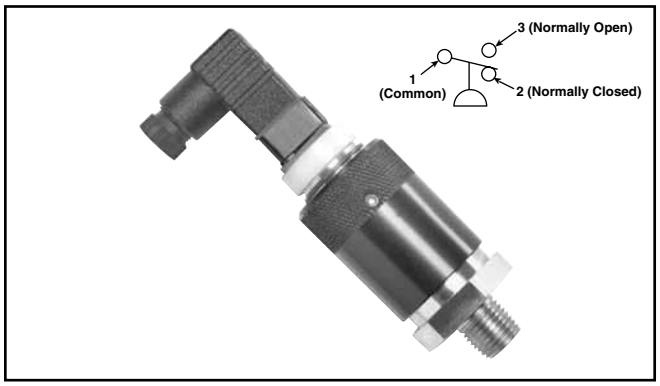

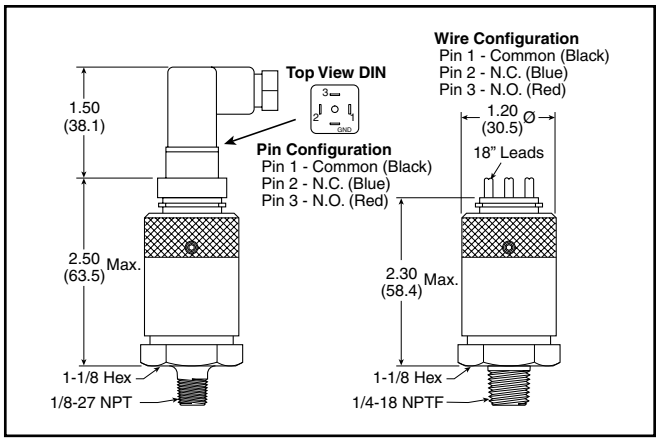

Features:

- Long life elastomer diaphragm
- High quality snap action switch
- Field adjustable
- Compact design
- Easily customized
- Quick delivery
- NEMA 4, 13

Operation

The pressure switch monitors the air pressure in your pneumatic system. When the pressure in your system either drops below or exceeds the set point pressure, an electrical output is given.

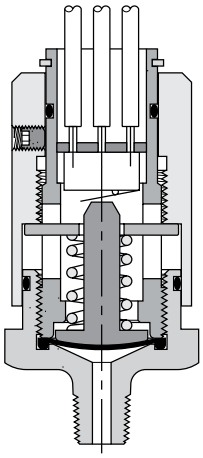

Ordering Information

PPS1 - **1** (Thread) **C** (Circuit) **3** (Range) - **R** (Set Point Direction) **HM** (Electrical Connection)

Thread	
1	1/4" NPT Male
2	1/8" NPT Male
17	1/4" BSPP Male
28	1/8" BSPP Male

Circuit	
C	SPDT

Range*	
1	3-10 PSI
2	6-30 PSI
3	20-120 PSI
4	100-400 PSI†

† Only available in 1/4" NPT

Set Point Direction	
R	Rising

Electrical Connection	
HM	DIN 9.4mm
WL	Wire Leads 18"

* Factory setting for calibration purposes
Range 1 = 6 PSI
Range 2 = 18 PSI
Range 3 = 70 PSI
Range 4 = 250 PSI

Note: Switch is field adjustable.

Definitions and Terminology

Repeatability — Accuracy is the maximum allowable set point deviation of a single pressure or temperature switch under one given set of environmental and operational conditions.

Single Pole Double Throw (SPDT) Switching element — A SPDT switching element has one normally open, one normally closed and one common terminal. Three terminals mean that the switch can be wired with the circuit either normally open (NO), or normally closed (NC), or both.

Dead Band — The dead band, sometimes referred to as "differential" or "hysterisis", is the change in pressure between actuation and deactuation set points.

Specifications

Set Point Tolerance ..... ±1 PSI or 5% (.07 bar)
Temperature Range ..... -40F° to 220F° (-40C° to 105C°)
Max. Operating Pressure (Ranges 1, 2, 3) ..... 250 PSI (17.2 bar)
Max. Operating Pressure (Range 4) ..... 2000 PSI (137.9 bar)
Deadband ..... 10 - 20% of set pressure
Current Rating ..... 3A @ 125 VAC
2A @ 30 VDC (Resistive)
Circuit Form ..... SPDT Standard
Cycle Life ..... 1 Million

Materials of Construction

Adjustment Knob ..... Anodized Aluminum
Body ..... Brass
Diaphragm ..... Nitrile

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

WDV3-G

The WDV3 Electrical Drain is designed to remove condensate from compressors, compressed air dryers and receivers up to any size, type or manufacturer.

The WDV3 offers true installation simplicity and it is recognized as the most reliable and best performing condensate drain worldwide. The large orifice in the direct acting valve, combined with its sophisticated timer module ensure many years of trouble-free draining of condensate.

Benefits

- Does Not Air-Lock During Operation
- Compressed Air Systems Up to Any Size
- Also Available In Stainless Steel
- The Direct Acting Valve Is Serviceable
- Suitable for All Types of Compressors
- TEST (Micro-Switch) Feature
- High Time Cycle Accuracy
- Large (4.5mm) Valve Orifice

Ordering Information

	Family	Voltage	Pipe Size	Valve Material	Pressure
WDV3 –	G	1	2	B	L

Family
G General

Voltage
1 120V AC
2 230V AC
3* 24VDC
* Available in 1/2" Only

Pipe Size
2 1/4" General
3 3/8" General
4 1/2" General

Valve Material
B Brass

Pressure
L 230 PSIG (16 bar)

Specifications

Operating Pressure..... 230 PSIG (15,9 bar)

Ambient Operating Range Temperature:
34° to 130°F (1.1° to 54°C)

Coil Insulation
Class H .....340°F (171.1°C)

Voltages
AC 115, 230/50-60

Timer:
Open Time..... .5 to 10 sec., Adjustable
Cycle Time..... .5 sec. to 45 min., Adjustable

Maximum Current Rating .....4mA Max.

Port Size..... 1/4, 3/8, 1/2 NPT

Weight ..... 1.8 lb. (0.8 kg)

Materials of Construction

aling Material ..... FPM (Fluorocarbon)

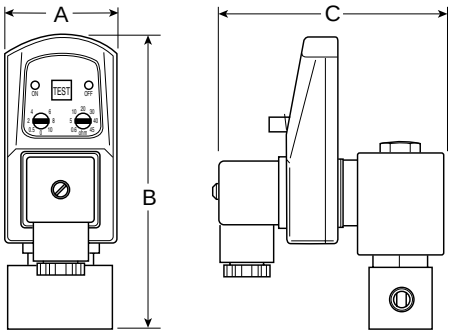

Model Selection and Dimensions

Model Number	A	B	C
WDV3-G**BL	1.73 (44)	4.53 (115)	3.46 (88)

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Zero air loss condensate drains are designed for economical removal of unwanted water, oil emulsions, and other liquids. These drains will only open when liquid is present and will not allow any compressed air to escape from the system.

Operating Information

Maximum pressure		232 PSIG (16 bar)
Ambient operating temperature		35°F to 140°F (1.6°C to 60°C)
Voltages	NPT	115/50-60Hz, standard
Optional:	BSPP ports	230/50-60Hz & 24VDC

Zero Air Loss Condensate Drains

Port size (NPT)	Compressor aftercooler (SCFM)*	Capacity refrigeration dryer (SCFM)**	Filter (SCFM)	Drain capacity per day (gal/liter)	Model number	Service kit †
3/8	—	—	424	6 (22.7)	**ED3002N115-K**	**SKED3000N115**
1 x 1/2, 3/8	141	282	1,413	13 (49.2)	**ED3004N115-K**	**SKED3000N115**
2 x 1/2, 3/8	247	494	2,472	23 (87.1)	**ED3007N115-K**	**SKED3000N115**
2 x 1/2, 3/8	1,059	2,119	10,594	100 (378.5)	**ED3030N115-K**	**SKED3000N115**
2 x 1/2, 3/8	3,532	7,063	35,315	330 (1,249.2)	**ED3100N115-K**	**SKED3000N115**

* Based on 100 PSI working pressure, air compressor inlet at 77°F (25°C) at 60% RH, air discharge temperature od 95°F (35°C) following the aftercooler, pressure dewpoint of 37°F (2.8°C) after the refrigerated dryer.
** Condensate from aftercooler or refrigerated dryer to be drained upstream – only for residual oil content or small quantities of condensate.
† ——
Note: A 6 ft. line cord will be included with each drain.

Where are condensate drains used?

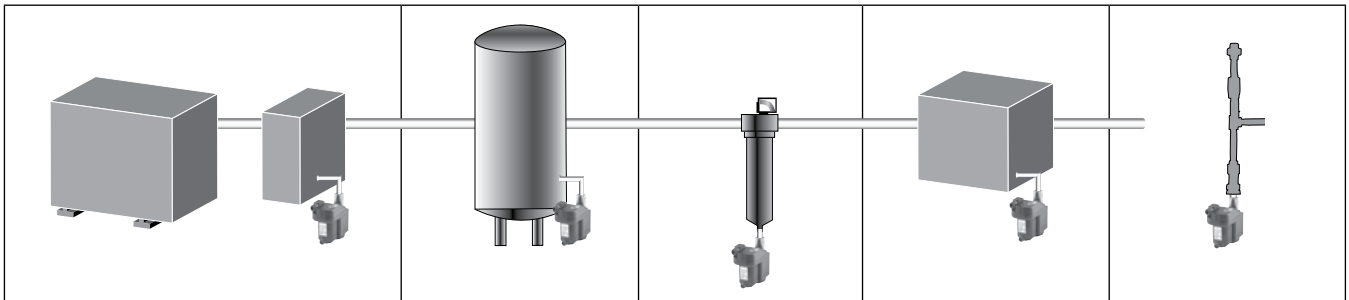

Compressor with aftercooler	Receiver tank	Filter	Air dryer	Drip leg
Removes the condensate that is collected after the air cools in the aftercooler	Removes the condensate that is collected when the air cools inside of the receiver tank	Removes the condensate that is collected in the filter bowl	Removes the condensate that is collected in the air dryer	Point-of-use applications: removes the condensate from compressed air pipes in a plant

Dimensions

ED3002N115-K



ED3004N115-K



ED3007N115-K



ED3030N115-K



ED3100N115-K



Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Notes

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Safety Guide For Selecting And Using Pneumatic Division Products And Related Accessories

⚠ WARNING:

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF PNEUMATIC DIVISION PRODUCTS, ASSEMBLIES OR RELATED ITEMS ("PRODUCTS") CAN CAUSE DEATH, PERSONAL INJURY, AND PROPERTY DAMAGE. POSSIBLE CONSEQUENCES OF FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THESE PRODUCTS INCLUDE BUT ARE NOT LIMITED TO:

- Unintended or mistimed cycling or motion of machine members or failure to cycle
- Work pieces or component parts being thrown off at high speeds.
- Failure of a device to function properly for example, failure to clamp or unclamp an associated item or device.
- Explosion
- Suddenly moving or falling objects.
- Release of toxic or otherwise injurious liquids or gasses.

Before selecting or using any of these Products, it is important that you read and follow the instructions below.

1. GENERAL INSTRUCTIONS

1.1. Scope: This safety guide is designed to cover general guidelines on the installation, use, and maintenance of Pneumatic Division Valves, FRLs (Filters, Pressure Regulators, and Lubricators), Vacuum products and related accessory components.

1.2. Fail-Safe: Valves, FRLs, Vacuum products and their related components can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of associated valves, FRLs or Vacuum products will not endanger persons or property.

1.3 Relevant International Standards: For a good guide to the application of a broad spectrum of pneumatic fluid power devices see: ISO 4414:1998, Pneumatic Fluid Power – General Rules Relating to Systems. See www.iso.org for ordering information.

1.4. Distribution: Provide a copy of this safety guide to each person that is responsible for selection, installation, or use of Valves, FRLs or Vacuum products. Do not select, or use Parker valves, FRLs or vacuum products without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the products considered or selected.

1.5. User Responsibility: Due to the wide variety of operating conditions and applications for valves, FRLs, and vacuum products Parker and its distributors do not represent or warrant that any particular valve, FRL or vacuum product is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:

- Making the final selection of the appropriate valve, FRL, Vacuum component, or accessory.
- Assuring that all user's performance, endurance, maintenance, safety, and warning requirements are met and that the application presents no health or safety hazards.
- Complying with all existing warning labels and / or providing all appropriate health and safety warnings on the equipment on which the valves, FRLs or Vacuum products are used; and,
- Assuring compliance with all applicable government and industry standards.

1.6. Safety Devices: Safety devices should not be removed, or defeated.

1.7. Warning Labels: Warning labels should not be removed, painted over or otherwise obscured.

1.8. Additional Questions: Call the appropriate Parker technical service department if you have any questions or require any additional information. See the Parker publication for the product being considered or used, or call 1-800-CPARKER, or go to www.parker.com, for telephone numbers of the appropriate technical service department.

2. PRODUCT SELECTION INSTRUCTIONS

2.1. Flow Rate: The flow rate requirements of a system are frequently the primary consideration when designing any pneumatic system. System components need to be able to provide adequate flow and pressure for the desired application.

2.2. Pressure Rating: Never exceed the rated pressure of a product. Consult product labeling, Pneumatic Division catalogs or the instruction sheets supplied for maximum pressure ratings.

2.3. Temperature Rating: Never exceed the temperature rating of a product. Excessive heat can shorten the life expectancy of a product and result in complete product failure.

2.4. Environment: Many environmental conditions can affect the integrity and suitability of a product for a given application. Pneumatic Division products are designed for use in general purpose industrial applications. If these products are to be used in unusual circumstances such as direct sunlight and/or corrosive or caustic environments, such use can shorten the useful life and lead to premature failure of a product.

2.5. Lubrication and Compressor Carryover: Some modern synthetic oils can and will attack nitrile seals. If there is any possibility of synthetic oils or greases migrating into the pneumatic components check for compatibility with the seal materials used. Consult the factory or product literature for materials of construction.

2.6. Polycarbonate Bowls and Sight Glasses: To avoid potential polycarbonate bowl failures:

- Do not locate polycarbonate bowls or sight glasses in areas where they could be subject to direct sunlight, impact blow, or temperatures outside of the rated range.
- Do not expose or clean polycarbonate bowls with detergents, chlorinated hydro-carbons, keytones, esters or certain alcohols.
- Do not use polycarbonate bowls or sight glasses in air systems where compressors are lubricated with fire resistant fluids such as phosphate ester and di-ester lubricants.

2.7. Chemical Compatibility: For more information on plastic component chemical compatibility see Pneumatic Division technical bulletins Tec-3, Tec-4, and Tec-5

2.8. Product Rupture: Product rupture can cause death, serious personal injury, and property damage.
- Do not connect pressure regulators or other Pneumatic Division products to bottled gas cylinders.
- Do not exceed the maximum primary pressure rating of any pressure regulator or any system component.
- Consult product labeling or product literature for pressure rating limitations.

3. PRODUCT ASSEMBLY AND INSTALLATION INSTRUCTIONS

3.1. Component Inspection: Prior to assembly or installation a careful examination of the valves, FRLs or vacuum products must be performed. All components must be checked for correct style, size, and catalog number. DO NOT use any component that displays any signs of nonconformance.

3.2. Installation Instructions: Parker published Installation Instructions must be followed for installation of Parker valves, FRLs and vacuum components. These instructions are provided with every Parker valve or FRL sold, or by calling 1-800-CPARKER, or at www.parker.com.

3.3. Air Supply: The air supply or control medium supplied to Valves, FRLs and Vacuum components must be moisture-free if ambient temperature can drop below freezing

4. VALVE AND FRL MAINTENANCE AND REPLACEMENT INSTRUCTIONS

4.1. Maintenance: Even with proper selection and installation, valve, FRL and vacuum products service life may be significantly reduced without a continuing maintenance program. The severity of the application, risk potential from a component failure, and experience with any known failures in the application or in similar applications should determine the frequency of inspections and the servicing or replacement of Pneumatic Division products so that products are replaced before any failure occurs. A maintenance program must be established and followed by the user and, at minimum, must include instructions 4.2 through 4.10.

4.2. Installation and Service Instructions: Before attempting to service or replace any worn or damaged parts consult the appropriate Service Bulletin for the valve or FRL in question for the appropriate practices to service the unit in question. These Service and Installation Instructions are provided with every Parker valve and FRL sold, or are available by calling 1-800-CPARKER, or by accessing the Parker web site at www.parker.com.

4.3. Lockout / Tagout Procedures: Be sure to follow all required lockout and tagout procedures when servicing equipment. For more information see: OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – (Lockout / Tagout)

4.4. Visual Inspection: Any of the following conditions requires immediate system shut down and replacement of worn or damaged components:
- Air leakage: Look and listen to see if there are any signs of visual damage to any of the components in the system. Leakage is an indication of worn or damaged components.
- Damaged or degraded components: Look to see if there are any visible signs of wear or component degradation.
- Kinked, crushed, or damaged hoses. Kinked hoses can result in restricted air flow and lead to unpredictable system behavior.
- Any observed improper system or component function: Immediately shut down the system and correct malfunction.
- Excessive dirt build-up: Dirt and clutter can mask potentially hazardous situations.

Caution: Leak detection solutions should be rinsed off after use.

4.5. Routine Maintenance Issues:
- Remove excessive dirt, grime and clutter from work areas.
- Make sure all required guards and shields are in place.

4.6. Functional Test: Before initiating automatic operation, operate the system manually to make sure all required functions operate properly and safely.

4.7. Service or Replacement Intervals: It is the user's responsibility to establish appropriate service intervals. Valves, FRLs and vacuum products contain components that age, harden, wear, and otherwise deteriorate over time. Environmental conditions can significantly accelerate this process. Valves, FRLs and vacuum components need to be serviced or replaced on routine intervals. Service intervals need to be established based on:
- Previous performance experiences.
- Government and / or industrial standards.
- When failures could result in unacceptable down time, equipment damage or personal injury risk.

4.8. Servicing or Replacing of any Worn or Damaged Parts: To avoid unpredictable system behavior that can cause death, personal injury and property damage:
- Follow all government, state and local safety and servicing practices prior to service including but not limited to all OSHA Lockout Tagout procedures (OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – Lockout / Tagout).
- Disconnect electrical supply (when necessary) before installation, servicing, or conversion.
- Disconnect air supply and depressurize all air lines connected to system and Pneumatic Division products before installation, service, or conversion.
- Installation, servicing, and / or conversion of these products must be performed by knowledgeable personnel who understand how pneumatic products are to be applied.
- After installation, servicing, or conversions air and electrical supplies (when necessary) should be connected and the product tested for proper function and leakage. If audible leakage is present, or if the product does not operate properly, do not put product or system into use.
- Warnings and specifications on the product should not be covered or painted over. If masking is not possible, contact your local representative for replacement labels.

4.9. Putting Serviced System Back into Operation: Follow the guidelines above and all relevant Installation and Maintenance Instructions supplied with the valve FRL or vacuum component to insure proper function of the system.

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics

Offer of Sale

The goods, services or work (referred to as the "Products") offered by **Parker-Hannifin Corporation**, its subsidiaries, groups, divisions, and authorized distributors ("Seller") are offered for sale at prices indicated in the offer, or as may be established by Seller. The offer to sell the Products and acceptance of Seller's offer by any customer ("Buyer") is contingent upon, and will be governed by all of the terms and conditions contained in this Offer of Sale. Buyer's order for any Products specified in Buyer's purchase document or Seller's offer, proposal or quote ("Quote") attached to the purchase order, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer.

1. Terms and Conditions. Seller's willingness to offer Products for sale or accept an order for Products is subject to the terms and conditions contained in this Offer of Sale or any newer version of the same, published by Seller electronically at www.parker.com/saleterms/. Seller objects to any contrary or additional terms or conditions of Buyer's order or any other document or other communication issued by Buyer.

2. Price; Payment. Prices stated on Seller's Quote are valid for thirty (30) days, except as explicitly otherwise stated therein, and do not include any sales, use, or other taxes or duties unless specifically stated. Seller reserves the right to modify prices to adjust for any raw material price fluctuations. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2010). Payment is subject to credit approval and payment for all purchases is due thirty (30) days from the date of invoice (or such date as may be specified by Seller's Credit Department). Unpaid invoices beyond the specified payment date incur interest at the rate of 1.5% per month or the maximum allowable rate under applicable law.

3. Shipment; Delivery; Title and Risk of Loss. All delivery dates are approximate. Seller is not responsible for damages resulting from any delay. Regardless of the manner of shipment, delivery occurs and title and risk of loss or damage pass to Buyer, upon placement of the Products with the shipment carrier at Seller's facility. Unless otherwise stated, Seller may exercise its judgment in choosing the carrier and means of delivery. No deferment of shipment at Buyers' request beyond the respective dates indicated will be made except on terms that will indemnify, defend and hold Seller harmless against all loss and additional expense. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions.

4. Warranty. Seller warrants that the Products sold hereunder shall be free from defects in material or workmanship for a period of twelve (12) months from the date of delivery or 2,000 hours of normal use, whichever occurs first. All prices are based upon the exclusive limited warranty stated above, and upon the following disclaimer: DISCLAIMER OF WARRANTY: THIS WARRANTY IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO PRODUCTS PROVIDED. SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING DESIGN, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

5. Claims; Commencement of Actions. Buyer shall promptly inspect all Products upon receipt. No claims for shortages will be allowed unless reported to the Seller within ten (10) days of delivery. No other claims against Seller will be allowed unless asserted in writing within thirty (30) days after delivery. Buyer shall notify Seller of any alleged breach of warranty within thirty (30) days after the date the defect is or should have been discovered by Buyer. Any claim or action against Seller based upon breach of contract or any other theory, including tort, negligence, or otherwise must be commenced within twelve (12) months from the date of the alleged breach or other alleged event, without regard to the date of discovery.

6. LIMITATION OF LIABILITY. IN THE EVENT OF A BREACH OF WARRANTY, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE A DEFECTIVE PRODUCT, OR REFUND THE PURCHASE PRICE WITHIN A REASONABLE PERIOD OF TIME. **IN NO EVENT IS SELLER LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF, OR AS THE RESULT OF, THE SALE, DELIVERY, NON-DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCTS OR ANY PART THEREOF, OR FOR ANY CHARGES OR EXPENSES OF ANY NATURE INCURRED WITHOUT SELLER'S WRITTEN CONSENT, WHETHER BASED IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE OF THE PRODUCTS.**

7. User Responsibility. The user, through its own analysis and testing, is solely responsible for making the final selection of the system and Product and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application and follow applicable industry standards and Product information. If Seller provides Product or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products or systems.

8. Loss to Buyer's Property. Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, will be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer ordering the items manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

9. Special Tooling. A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture Products. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the Products, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller has the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

10. Buyer's Obligation; Rights of Seller. To secure payment of all sums due or otherwise, Seller retains a security interest in all Products delivered to Buyer and this agreement is deemed to be a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect its security interest.

11. Improper Use and Indemnity. Buyer shall indemnify, defend, and hold Seller harmless from any losses, claims, liabilities, damages, lawsuits, judgments and costs (including attorney fees and defense costs), whether for personal injury, property damage, patent, trademark or copyright infringement or any other claim, brought by or incurred by Buyer, Buyer's employees, or any other person, arising out of: (a) improper selection, application, design, specification or other misuse of Products purchased by Buyer from Seller; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of patterns, plans, drawings, or specifications furnished by Buyer to manufacture Products; or (d) Buyer's failure to comply with these terms and conditions. Seller shall not indemnify Buyer under any circumstance except as otherwise provided.

12. Cancellations and Changes. Buyer may not cancel or modify or cancel any order for any reason, except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage. Seller may change Product features, specifications, designs and availability.

13. Limitation on Assignment. Buyer may not assign its rights or obligations under this agreement without the prior written consent of Seller.

14. Force Majeure. Seller does not assume the risk and is not liable for delay or failure to perform any of Seller's obligations by reason of events or circumstances beyond its reasonable control (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation: accidents, strikes or labor disputes, acts of any government or government agency, acts of nature, delays or failures in delivery from carriers or suppliers, shortages of materials, or any other cause beyond Seller's reasonable control.

15. Waiver and Severability. Failure to enforce any provision of this agreement will not invalidate that provision; nor will any such failure prejudice Seller's right to enforce that provision in the future. Invalidation of any provision of this agreement by legislation or other rule of law shall not invalidate any other provision herein. The remaining provisions of this agreement will remain in full force and effect.

16. Termination. Seller may terminate this agreement for any reason and at any time by giving Buyer thirty (30) days prior written notice. Seller may immediately terminate this agreement, in writing, if Buyer: (a) breaches any provision of this agreement (b) appoints a trustee, receiver or custodian for all or any part of Buyer's property (c) files a petition for relief in bankruptcy on its own behalf, or one if filed by a third party (d) makes an assignment for the benefit of creditors; or (e) dissolves its business or liquidates all or a majority of its assets.

17. Governing Law. This agreement and the sale and delivery of all Products are deemed to have taken place in, and shall be governed and construed in accordance with, the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to this agreement.

18. Indemnity for Infringement of Intellectual Property Rights. Seller is not liable for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Section. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets ("Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that a Product sold pursuant to this agreement infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If a Product is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Product, replace or modify the Product so as to make it noninfringing, or offer to accept return of the Product and refund the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller is not liable for claims of infringement based on information provided by Buyer, or directed to Products delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any Product sold hereunder. The foregoing provisions of this Section constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

19. Entire Agreement. This agreement contains the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter are herein merged. The terms contained herein may not be modified unless in writing and signed by an authorized representative of Seller.

20. Compliance with Laws. Buyer agrees to comply with all applicable laws, regulations, and industry and professional standards of care, including those of the United Kingdom, the United States of America, and the country or countries in which Buyer may operate, including without limitation the U. K. Bribery Act, the U.S. Foreign Corrupt Practices Act ("FCPA"), the U.S. Anti-Kickback Act ("Anti-Kickback Act") and the U.S. Food Drug and Cosmetic Act ("FDCA"),each as currently amended, and the rules and regulations promulgated by the U.S. Food and Drug Administration ("FDA"), and agrees to indemnify and hold harmless Seller from the consequences of any violation of such provisions by Buyer, its employees or agents. Buyer acknowledges that it is familiar with the provisions of the U. K. Bribery Act, the FCPA, the FDA, and the Anti-Kickback Act, and certifies that Buyer will adhere to the requirements thereof. In particular, Buyer represents and agrees that Buyer will not make any payment or give anything of value, directly or indirectly to any governmental official, any foreign political party or official thereof, any candidate for foreign political office, or any commercial entity or person, for the purpose of influencing such person to purchase Products or otherwise benefit the business of Seller.

05/14

H

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics